


# XUSZFB2

Column Double fixing base with springs and adjustment screws for positioning

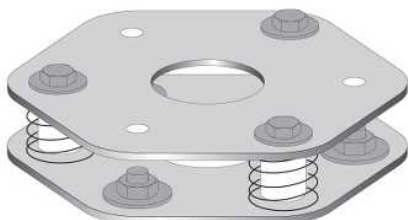

## Main

Range of product	Preventa Safety detection
Accessory / separate part category	Mounting and fixing accessories
Accessory / separate part type	Fixing base
Product compatibility	XUSL2E XUSL4E
Accessory / separate part destination	Fixing column

## Complementary

Ambient air temperature for operation	-10...50 °C 14...121 °F
Ambient air temperature for storage	-25...70 °C -13...158 °F
Kit composition	2 plate(s)
Column height	47 mm
Height protected	47 mm
Product weight	2.2 kg

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1425 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Available <a href="#">Download End Of Life Manual</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

---

Dimensions

---



---

## Mounting and Clearance

---

### Double Fixing Base XUSZFB2

$\frac{\text{mm}}{\text{in.}}$

