

Price\* : 141.53 GBP



### Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	106 mm
IP degree of protection	IP55 (with accessory) conforming to IEC 60529 IP23 conforming to IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, green

### Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part PMMA (polymethyl methacrylate): globe
CAD overall width	106 mm
CAD overall depth	106 mm
Product weight	0.5 kg
Marking	CE
Product mounting	By 3 M4 screws
Supply voltage limits	10...15 V DC 10.8...13.2 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	250 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm <sup>2</sup>
AWG gauge	AWG 18
Cable length	400 mm

### Environment

Standards	EN 61000-6-2 EN 61000-6-4
Product certifications	UL
Protective treatment	TC

Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140

### Contractual warranty


Warranty	18 months
----------	-----------

---

Rotating Mirror Beacon

---

Dimensions

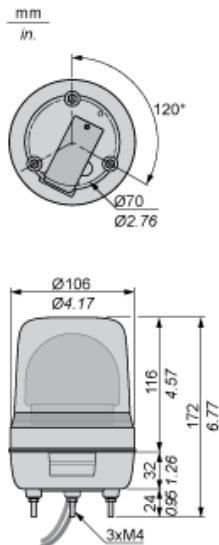

---

Rotating Mirror Beacon

---

Panel Cut-out

