



Price* : 143.70 GBP



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	106 mm
IP degree of protection	IP55 (with accessory) conforming to IEC 60529 IP23 conforming to IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, blue

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part PMMA (polymethyl methacrylate): globe
CAD overall width	106 mm
CAD overall depth	106 mm
Product weight	0.5 kg
Marking	CE
Product mounting	By 3 M4 screws
Supply voltage limits	10...15 V DC 10.8...13.2 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	250 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm ²
AWG gauge	AWG 18
Cable length	400 mm

Environment

Standards	EN 61000-6-2 EN 61000-6-4
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140

Offer Sustainability


Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Rotating Mirror Beacon

Dimensions

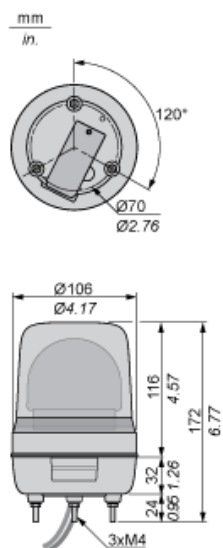

Rotating Mirror Beacon

Panel Cut-out

