



Price\* : 187.02 GBP



### Main

|                           |                                                     |
|---------------------------|-----------------------------------------------------|
| Range of product          | Harmony XVR                                         |
| Product or component type | Prewired rotating mirror beacon                     |
| Sound signalling          | Buzzer                                              |
| Device short name         | XVR                                                 |
| Mounting diameter         | 120 mm                                              |
| IP degree of protection   | IP23 conforming to IEC 60529                        |
| [Us] rated supply voltage | 12 V AC/DC                                          |
| Light source              | High luminosity LED, red                            |
| Noise level               | 50...90 dB (continuous or intermittent tone) at 1 m |

### Complementary

|                                        |                                                               |
|----------------------------------------|---------------------------------------------------------------|
| Material                               | ABS (acrylonitrile butadiene-styrene): body part<br>AS: globe |
| CAD overall width                      | 120 mm                                                        |
| CAD overall depth                      | 120 mm                                                        |
| Product weight                         | 0.5 kg                                                        |
| Marking                                | CE                                                            |
| Product mounting                       | By 3 M5 screws                                                |
| Supply voltage limits                  | 10...15 V DC<br>10.8...13.2 V AC                              |
| [Uimp] rated impulse withstand voltage | 0.8 kV                                                        |
| Current consumption                    | 333 mA                                                        |
| Flashing frequency                     | 2.3 Hz                                                        |
| Clamping connection capacity           | 0.83 mm <sup>2</sup>                                          |
| AWG gauge                              | AWG 18                                                        |
| Cable length                           | 400 mm                                                        |

## Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Standards                             | EN 61000-6-4<br>EN 61000-6-2     |
| Protective treatment                  | TC                               |
| Ambient air temperature for storage   | -35...70 °C                      |
| Ambient air temperature for operation | -10...50 °C                      |
| Electrical shock protection class     | Class II conforming to IEC 61140 |


## Offer Sustainability

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                             |
| REACH free of SVHC         | Yes                                                                                               |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                               |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                     |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                           |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

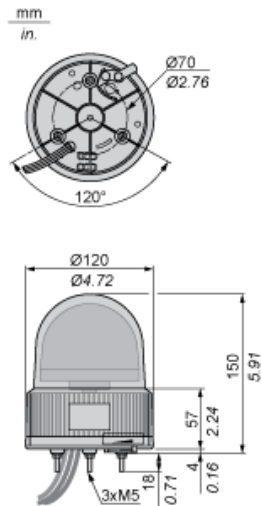

## Rotating Mirror Beacon

### Panel Cut-out

