

Main

| | |
|------------------------------------|---------------------------------------------------------------------------------|
| Accessory / separate part category | Cabling accessories |
| Accessory / separate part type | Connector |
| Electrical connection | Straight female connector M18, 4 pins |
| Collar material | Plastic |
| Status LED | Without |
| Cable connection | Screw terminal / wire size $\leq 1.5 \text{ mm}^2$ / clamping capacity 5...8 mm |

Complementary

| | |
|--------------------------------|------------------------------------|
| Cable gland type | Pg 9 |
| Cable connector fixing | Screw-on |
| [Ue] rated operational voltage | 250 V AC |
| [In] rated current | 16 A |
| Enclosure material | Plastic |
| Insulating resistance | $> 1000 \text{ G}\Omega$ |
| Contact resistance | $\leq 10000 \text{ }\mu\text{Ohm}$ |
| Product weight | 0.035 kg |


Environment

| | |
|---------------------------------------|-------------|
| IP degree of protection | IP65 |
| Ambient air temperature for operation | -40...85 °C |

Offer Sustainability

| | |
|------------------------|---------------------------------------------------------------------------------------|
| RoHS (date code: YYWW) | Compliant - since 0545 - Schneider Electric declaration of conformity |
|------------------------|---------------------------------------------------------------------------------------|

Dimensions

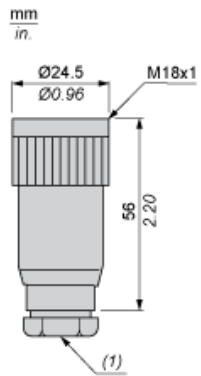

(1) Pg 9 cable gland

Connections and Schemes

