



Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M23, 19 pins
Collar material	Metal
Status LED	Without
Cable connection	Solder terminal / wire size $\leq 1 \text{ mm}^2$ / clamping capacity 9...12 mm

Complementary

Cable gland type	Pg 13.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	75 V DC 60 V AC
[In] rated current	7.5 A
Enclosure material	Metal
Insulating resistance	$> 10000000 \text{ G}\Omega$
Contact resistance	$\leq 5000 \mu\text{Ohm}$
Product weight	0.08 kg


Environment

IP degree of protection	IP65
Ambient air temperature for operation	-25...110 °C

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will be Compliant on 4Q2013

Dimensions

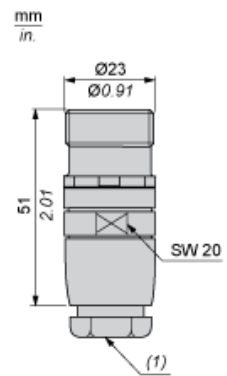

(1) Cable gland: no. 13 metal (Pg 13.5)

Connections and Schemes

