



## Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

## Complementary

Electrical connection	Straight female connector, connector type: M12 4 pins
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	10 m
Cable outer diameter	5.3 mm
Cable composition	4 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	300 V DC 250 V AC
[In] rated current	4 A
Contact resistance	<= 5000 μOhm
Insulating resistance	>= 1 GΩ
Product weight	0.37 kg

## Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-25...85 °C (static)
Ambient air temperature for storage	-35...100 °C


## Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0601 - <a href="#">Schneider Electric declaration of conformity</a>

---

Dimensions

---

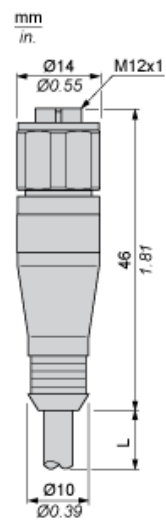


L : Length of cable

---

Connections and Schemes

---

Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White