



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Complementary

Electrical connection	Straight female connector, connector type: 1/2"20 UNF 3 pins
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	5 m
Cable outer diameter	5 mm
Cable composition	3 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	300 V DC 250 V AC
[In] rated current	4 A
Contact resistance	<= 5000 µOhm
Insulating resistance	>= 1 GΩ
Product weight	0.18 kg


Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-25...85 °C (static)
Ambient air temperature for storage	-35...100 °C

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0601 - Schneider Electric declaration of conformity

Dimensions

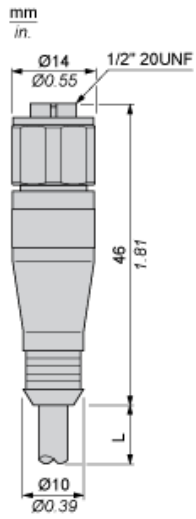

L : Length of cable

Connections and Schemes

Connectors



GN : Green
RD/ Red / White
WH :
RD/ Red / Black
BK :