



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |


Complementary

| | |
|--------------------------------|--|
| Electrical connection | Elbowed female connector, connector type: M12 5 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 5 m |
| Cable outer diameter | 5.2 mm |
| Cable composition | 5 x 0.34 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 75 V DC 60 V AC |
| [In] rated current | 3 A |
| Contact resistance | <= 5000 μOhm |
| Insulating resistance | >= 1 GΩ |
| Product weight | 0.201 kg |

Environment

| | |
|---------------------------------------|----------------------|
| IP degree of protection | IP65 IP67 |
| Ambient air temperature for operation | -25...80 °C (static) |
| Ambient air temperature for storage | -25...80 °C |


Dimensions

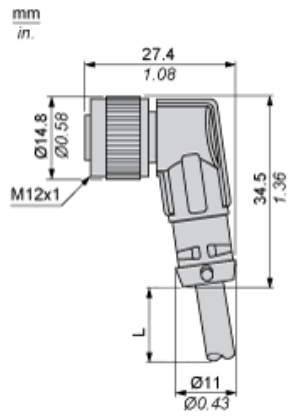

L : Length of cable

Connections and Schemes

Connectors



BU : Blue
BN : Brown
BK : Black
GY : Grey
BK/ Black / White
WH :