



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|--------------------------------|--|
| Jumper cable end 1 | M12 male, :4 pins (straight), fixing: screw-on |
| Jumper cable end 2 | M12 female, :4 pins (straight), fixing: screw-on |
| Cable composition | 4 x 0.34 mm ² |
| Cable length | 2 m |
| Wire insulation material | PUR |
| Cable outer diameter | 5.2 mm |
| [Ue] rated operational voltage | 300 V DC 250 V AC |
| [In] rated current | 4 A |
| Insulation resistance | >= 1000 MOhm |
| Resistance across terminals | <= 5000 mOhm |
| Product weight | 0.095 kg |


Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP65 IP67 IP69K |
| Ambient air temperature for operation | -5...90 °C (flexing) -35...90 °C (static) |
| Ambient air temperature for storage | -35...100 °C |

Offer Sustainability

| | |
|----------------------------------|---|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 0649 - Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold |
| Product environmental profile | Available Download Product Environmental |
| Product end of life instructions | Available Download End Of Life Manual |

Dimensions

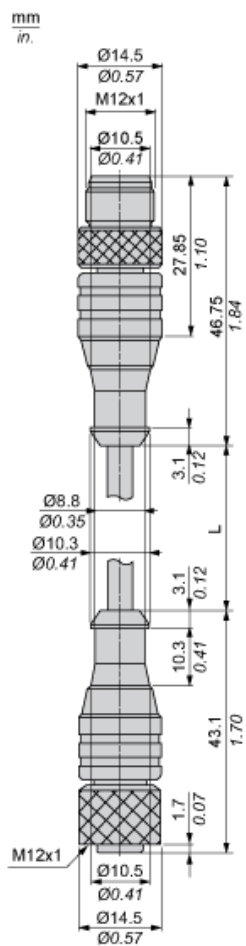

L : Length of cable

Connections and Schemes

