

# ZB4BX84

red Ø60 Emergency stop switching off head Ø22  
trigger and latching push-pull



## Main

|                               |                                              |
|-------------------------------|----------------------------------------------|
| Range of product              | Harmony XB4                                  |
| Product or component type     | Head for emergency switching off push-button |
| Device short name             | ZB4                                          |
| Bezel material                | Chromium plated metal                        |
| Mounting diameter             | 22 mm                                        |
| Sale per indivisible quantity | 1                                            |
| Shape of signaling unit head  | Round                                        |
| Type of operator              | trigger action and mechanical latching       |
| Reset                         | Push-pull                                    |
| Operator profile              | Red mushroom Ø 60 mm, unmarked               |
| Head type                     | Standard                                     |

## Complementary

|                                    |                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width                  | 60 mm                                                                                                                                                                                                                                                                                                                             |
| CAD overall height                 | 60 mm                                                                                                                                                                                                                                                                                                                             |
| CAD overall depth                  | 56 mm                                                                                                                                                                                                                                                                                                                             |
| Product weight                     | 0.098 kg                                                                                                                                                                                                                                                                                                                          |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                                                                                                                                                                                                                                                                                             |
| Mechanical durability              | 300000 cycles                                                                                                                                                                                                                                                                                                                     |
| Electrical composition code        | C7 for <4 contacts using single blocks in front mounting<br>C8 for <4 contacts using single and double blocks in front mounting<br>C11 for <3 contacts using single blocks in front mounting<br>C15 for <1 contacts using single blocks in front mounting<br>C10 for <4 contacts using single and double blocks in front mounting |
| Device presentation                | Basic element                                                                                                                                                                                                                                                                                                                     |

## Environment

|                      |    |
|----------------------|----|
| Protective treatment | TH |
|----------------------|----|

|                                       |                                                                                                                                                                                         |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                             |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                             |
| Electrical shock protection class     | Class I conforming to IEC 61140                                                                                                                                                         |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K                                                                                                                                   |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X<br>NEMA 4<br>NEMA 12                                                                                                                                                 |
| IK degree of protection               | IK03 conforming to IEC 50102                                                                                                                                                            |
| Standards                             | EN/IEC 60947-5-4<br>UL 508<br>EN/ISO 13850<br>CSA C22.2 No 14<br>IEC 60364-5-53<br>EN/IEC 60947-5-5<br>EN/IEC 60947-5-1<br>GB 14048.5<br>JIS C8201-5-1<br>EN/IEC 60947-1<br>JIS C8201-1 |
| Product certifications                | CSA<br>RINA<br>DNV<br>UL listed<br>BV<br>LROS (Lloyds register of shipping)<br>GL                                                                                                       |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                                        |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27          |

### Offer Sustainability

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                             |
| REACH free of SVHC         | Yes                                                                                               |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                               |
| Mercury free               | Yes                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                               |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                     |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                           |


### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

---

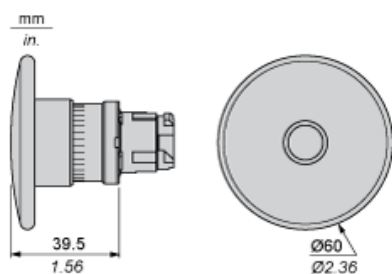

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board                                                                                                                                                                                                                                                                                                                                           | Connection by Faston Connectors                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                |  |
| <div><div>(1)</div><div>Diameter on finished panel or support</div><div>(2)</div><div>40 mm min. / 1.57 in. min.</div><div>(3)</div><div>30 mm min. / 1.18 in. min.</div><div>(4)</div><div>Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm <sub>0</sub><sup>+0.4</sup> / 0.88 in. <sub>0</sub><sup>+0.016</sup>)</div><div>(5)</div><div>45 mm min. / 1.78 in. min.</div><div>(6)</div><div>32 mm min. / 1.26 in. min.</div></div> |                                                                                   |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)



- A: 30 mm min. / 1.18 in. min.  
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm



- A: 30 mm min.  
B: 40 mm min.

Dimensions in in.



A: 1.18 in. min.

B: 1.57 in. min.


## General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in:  $T_1 + T_2 = 0.3 \text{ mm max.}$

## Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter:  $22.4 \text{ mm} \pm 0.1 / 0.88 \text{ in.} \pm 0.004$
- Orientation of body/fixing collar ZB4 BZ009:  $\pm 2^\circ 30'$  (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

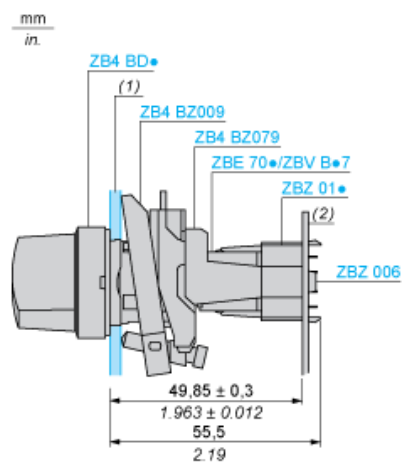

(1) Panel

(2) Printed circuit board

### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 for centring adapter ZBZ 01•
- 3 8  $\times$   $\varnothing$  1.2 mm / 0.05 in. holes
- 4 1 hole  $\varnothing$  2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes  $\varnothing$  2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.

Electrical Composition Corresponding to Code C7



---

Electrical Compositions Corresponding to Code C8

---



Electrical Compositions Corresponding to Code C10



---

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

---




---


Electrical Composition Corresponding to Code C15

---


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



---

Legend

---

Single contact



Double contact



Light block



Possible location

