



## Main

|                               |                              |
|-------------------------------|------------------------------|
| Range of product              | Harmony XB5                  |
| Product or component type     | Head for key selector switch |
| Device short name             | ZB5                          |
| Bezel material                | Dark grey plastic            |
| Mounting diameter             | 30 mm                        |
| Head type                     | Built-in-flush               |
| Sale per indivisible quantity | 1                            |
| Shape of signaling unit head  | Round                        |
| Type of operator              | stay put                     |
| Operator profile              | Blue standard handle         |
| Operator position information | 2 positions 90°              |

## Complementary

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width           | 37 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| CAD overall height          | 37 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| CAD overall depth           | 46 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product weight              | 0.031 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Mechanical durability       | 1000000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electrical composition code | C3 for <6 contacts using single blocks in front mounting<br>C4 for <6 contacts using single and double blocks in front mounting<br>C5 for <5 contacts using single blocks in front mounting<br>C6 for <5 contacts using single and double blocks in front mounting<br>C7 for <4 contacts using single blocks in front mounting<br>C8 for <4 contacts using single and double blocks in front mounting<br>C11 for <3 contacts using single blocks in front mounting<br>C15 for <1 contacts using single blocks in front mounting<br>SF1 for <3 contacts using single blocks in front mounting |

## Environment

|                                       |                                                                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                                                             |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                    |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                    |
| Overvoltage category                  | Class II conforming to IEC 60536                                                                                                                                               |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67 conforming to IEC 60529<br>IP69K<br>IP69                                                                                                  |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                                                             |
| Resistance to high pressure washer    | 7000000 Pa at 55 °C, distance : 0.1 m                                                                                                                                          |
| IK degree of protection               | IK03 conforming to IEC 50102                                                                                                                                                   |
| Standards                             | JIS C8201-5-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-1<br>UL 508<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1<br>JIS C8201-1                                                            |
| Product certifications                | LROS (Lloyds register of shipping)<br>DNV<br>CSA<br>RINA<br>BV<br>UL listed<br>GL                                                                                              |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |


## Offer Sustainability

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                             |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                 |
| REACH free of SVHC         | Yes                                                                                               |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                               |
| Mercury free               | Yes                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                               |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                     |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                           |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


## Dimensions

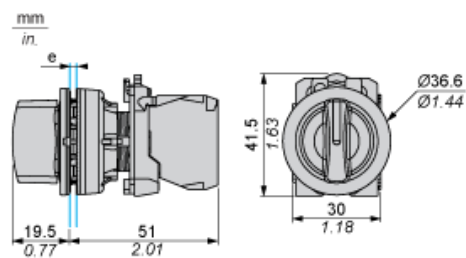

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors




- (1) Diameter on finished panel or support
- (2) Ø30.75 mm recommended ( $\text{Ø}30.5 \text{ }_0^{+0.5}$ ) / Ø1.21 in. recommended ( $\text{Ø}1.20 \text{ in. }_0^{+0.0196}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 40      | 1.57     |
| By Faston connectors                          | 45      | 1.77     | 40      | 1.57     |

---

Electrical Composition Corresponding to Code C3

---



Electrical Composition Corresponding to Code C4



---

Electrical Composition Corresponding to Code C5

---




Electrical Composition Corresponding to Code C6



---

Electrical Composition Corresponding to Code C7

---



Electrical Composition Corresponding to Code C8



---

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

---



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



---

## Legend

---

Single contact



Double contact



Light block



Possible location



## Sequence of Contacts Fitted to 2-position Selector Switch Body

### Position 315°



|          |          |        |                                                                                   |                                                                                     |                                                                                     |
|----------|----------|--------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Push     | Position | Top    |  |                                                                                     |                                                                                     |
|          |          | Bottom |  |  |  |
|          | Location |        | Left                                                                              | Centre                                                                              | Right                                                                               |
|          | State    |        | 0                                                                                 | 0                                                                                   | 0                                                                                   |
| Contacts | N/O      |        | open                                                                              | open                                                                                | open                                                                                |
|          | N/C      |        | closed                                                                            | closed                                                                              | closed                                                                              |

### Position 45°



|          |          |        |                                                                                     |        |        |
|----------|----------|--------|-------------------------------------------------------------------------------------|--------|--------|
| Push     | Position | Top    |                                                                                     |        |        |
|          |          | Bottom |  |        |        |
|          | Location |        | Left                                                                                | Centre | Right  |
|          | State    |        | 1                                                                                   | 1      | 1      |
| Contacts | N/O      |        | closed                                                                              | closed | closed |
|          | N/C      |        | open                                                                                | open   | open   |