


PRODUCT-DETAILS

N2119 AN

N2119 AN - Buzzer - 1M - Anthracite

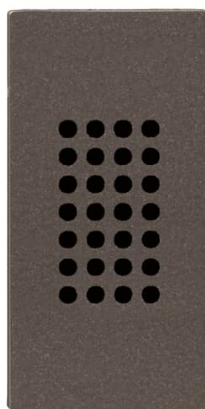

Ogólne informacje

Extended Product Type	N2119 AN
ID Produktu	2CLA211900N1801
Numer EAN	8427238068404
Opis katalogowy	N2119 AN - Buzzer - 1M - Anthracite
Opis	Color: Anthracite. Rated voltage: 127 - 230 Vac / 50 - 60 Hz Rated power: 8 VA Adjustable tone Acoustic power at 1 meter with cover plate: 75 dB Size: 1 module.

Charakterystyka zamówienia

Numer EAN	8427238068404
Minimalna ilość zamówienia	10 sztuka
Kod taryfy celnej	85365080

Wymiary

Szerokość produktu netto	22 mm
Wysokość produktu netto	44 mm

Waga produktu netto	0.034 kg
---------------------	----------

Informacje o pakowaniu

Jednostka opakowania (poziom 1)	box 10 sztuka
Szerokość opakowania (poziom 1)	77 mm
Wysokość opakowania (poziom 1)	50 mm
Długość opakowania (poziom 1)	297 mm
Waga opakowania brutto (poziom 1)	0.34 kg
EAN opakowania (poziom 1)	8427238068404

Normy środowiskowe

Temperatura powietrza otoczenia	Eksplatacja -5 ... +35 °C Przechowywanie -5 ... +50 °C
---------------------------------	---

Dodatkowe informacje

Rodzaj prądu	AC
Stopień ochrony obudowy	IP20
Materiał obudowy	Plastic
Rodzaj montażu	Built-in
	0.2 A
Typ produktu	Zenit
Nazwa produktu	Buzzer - 1M - Anthracite
Napięcie znamionowe (U_r)	250 V
ID produktu zastąpionego	2CL0N211908
Sound dB (A)	75 dB
Surface Finishing	Untreated

Certyfikaty i deklaracje (Numer dokumentu)

Arkusze danych, informacja techniczna	9AKK10103A5108
Deklaracja zgodności - CE	9AKK106930A5892
Instrukcje i podręczniki	2CLX210109N1001

Klasyfikacje

ETIM 5	EC000844 - Buzzer
ETIM 6	EC000844 - Buzzer
ETIM 7	EC000844 - Buzzer
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)

Kategorie

Produkty niskiego napięcia i systemy → Switch Assortments → Flush Mounted Modular Range - Niessen → Design Zenit → Cover Plates for Flush Mounted Inserts → Multimedia Devices

Produkty niskiego napięcia i systemy → Switch Assortments → Multimedia Devices → Multimedia Devices → Multimedia Devices - Flush Mounted → Multimedia Devices

