

SITOR FUSE-LINK SIZE 1 160A, AC 1000V



Similar to image

| Technical data:                                      |    |             |
|------------------------------------------------------|----|-------------|
| Current / for AC / rated value                       | A  | 160         |
| Size of the fallback-system / acc. to DIN EN 60269-1 |    | NH1         |
| Supply voltage                                       |    |             |
| • for AC / rated value                               | V  | 1,000       |
| • for DC                                             | V  | 440         |
| Switching capacity current                           |    |             |
| • in accordance with IEC 60947-2 / rated value       | kA | 65          |
| Design of an identification indicator                |    | others      |
| Ambient temperature                                  | °C | -20 ... +50 |
| Varying load factor (WL)                             |    | 0.95        |

| Certificates/approvals:                                                                    |                                                                                                 |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| General Product Approval                                                                   | Declaration of Conformity                                                                       |
| <br>CCC | <br>GOST     |
| <br>UL  | <br>EG-Konf. |

Further information:

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NE3224/all>

---


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE3224](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE3224)

---

**CAX-Online-Generator**

<http://www.siemens.com/cax>

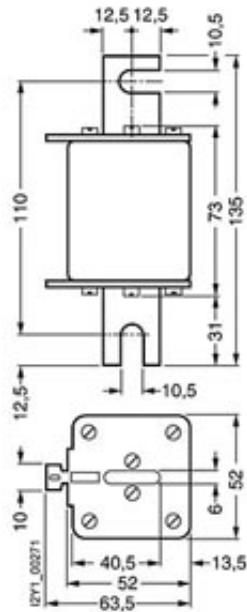

**last change:**

Feb 15, 2013