


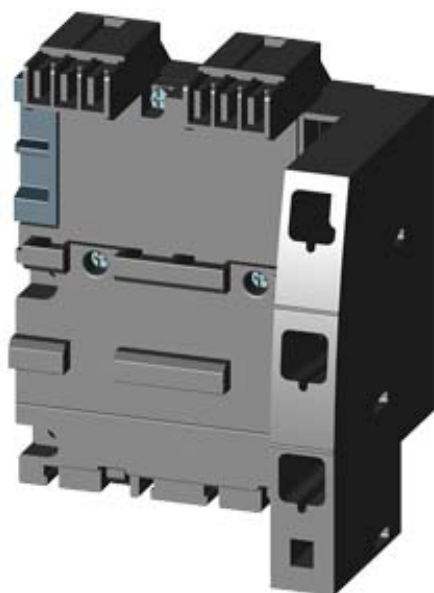

3-PHASE BUSBAR WITH INFEEED RIGHT,
FOR 2 CIRCUIT-BREAKERS, SIZE S00 UND S0

General technical data:

product brand name		SIRIUS
Product designation		3-phase busbars with infeed
Size of the circuit-breaker		S00, S0
Design of the product		for 2 switches with infeed on the right
Suitability for use		circuit-breakers 3RV2

Installation/mounting/dimensions:

mounting position		any
Mounting type		snap-on fastening on 35 mm standard rail
Width	mm	110
Height	mm	129
Depth	mm	86.5
Spacing required		
• for live parts	mm	10
• for live parts	mm	0
• for live parts	mm	0
Spacing required		
• for grounded parts	mm	10
• for grounded parts	mm	0
• for grounded parts	mm	0

Spacing required

- with side-by-side mounting
- with side-by-side mounting
- with side-by-side mounting

mm	10
mm	0
mm	0

Certificates/approvals:

Certificate of suitability

CE / UL / CSA / CCC

General Product Approval



Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



GL



LRS



PRS

Shipping Approval

other



RINA



RMRS

[Confirmation](#)



VDE

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RV2917-1E/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2917-1E

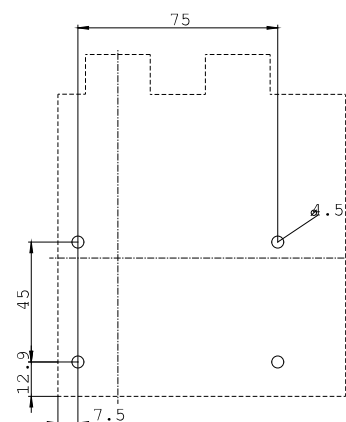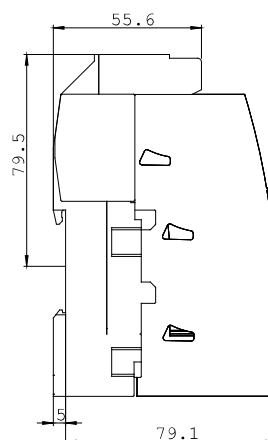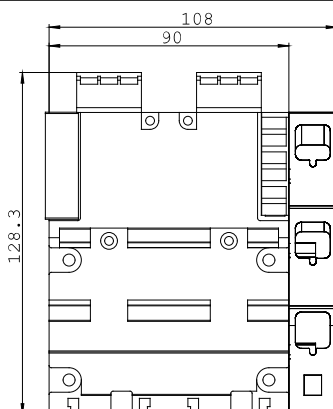

last change:

Nov 17, 2014