



OUTPUT COUPLING DEVICE, 1 W,
SPRING-LOADED TERMINAL, 110 V ACDC,
HOUSINGWIDTH 6.2 MM OPERATING RANGE 0.7...1.25 X
US

General technical details:		
Type of voltage		AC/DC
Supply voltage frequency / for auxiliary and control current circuit / rated value		
• minimum	Hz	50
• maximum	Hz	60
Control supply voltage		
• at 50 Hz / at AC / rated value		
• minimum	V	110
• maximum	V	110
• at 60 Hz / at AC / rated value		
• minimum	V	110
• maximum	V	110
• for DC / rated value		
• minimum	V	110
• maximum	V	110
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		1
Operating current / of the auxiliary contacts		
• at DC-13		


• at 24 V	A	1
• at 110 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 230 V	A	3
Switching behaviour		monostable
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
Reference code / according to DIN EN 61346-2		K

Mechanical design:		
Design of the electrical connection		spring-loaded terminals
Design of the electrical connection / jumper socket		No
Design of the relay operating mechanism		poled
Design of the switching function		changeover switch
• guided		No
Product component / jumper socket		No
Width	mm	6.2
Height	mm	80
Depth	mm	86

Ambient conditions:		
Protection class IP		IP20
Ambient temperature		
• during operating	°C	-25 ... +60

Certificates/approvals:			
General Product Approval		Test Certificates	other
			Special Test Certificate
CCC		UL	Declaration of Conformity other

Further information:
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall
CAX-Online-Generator http://www.siemens.com/cax
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3TX7005-1LN00/all
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TX7005-1LN00

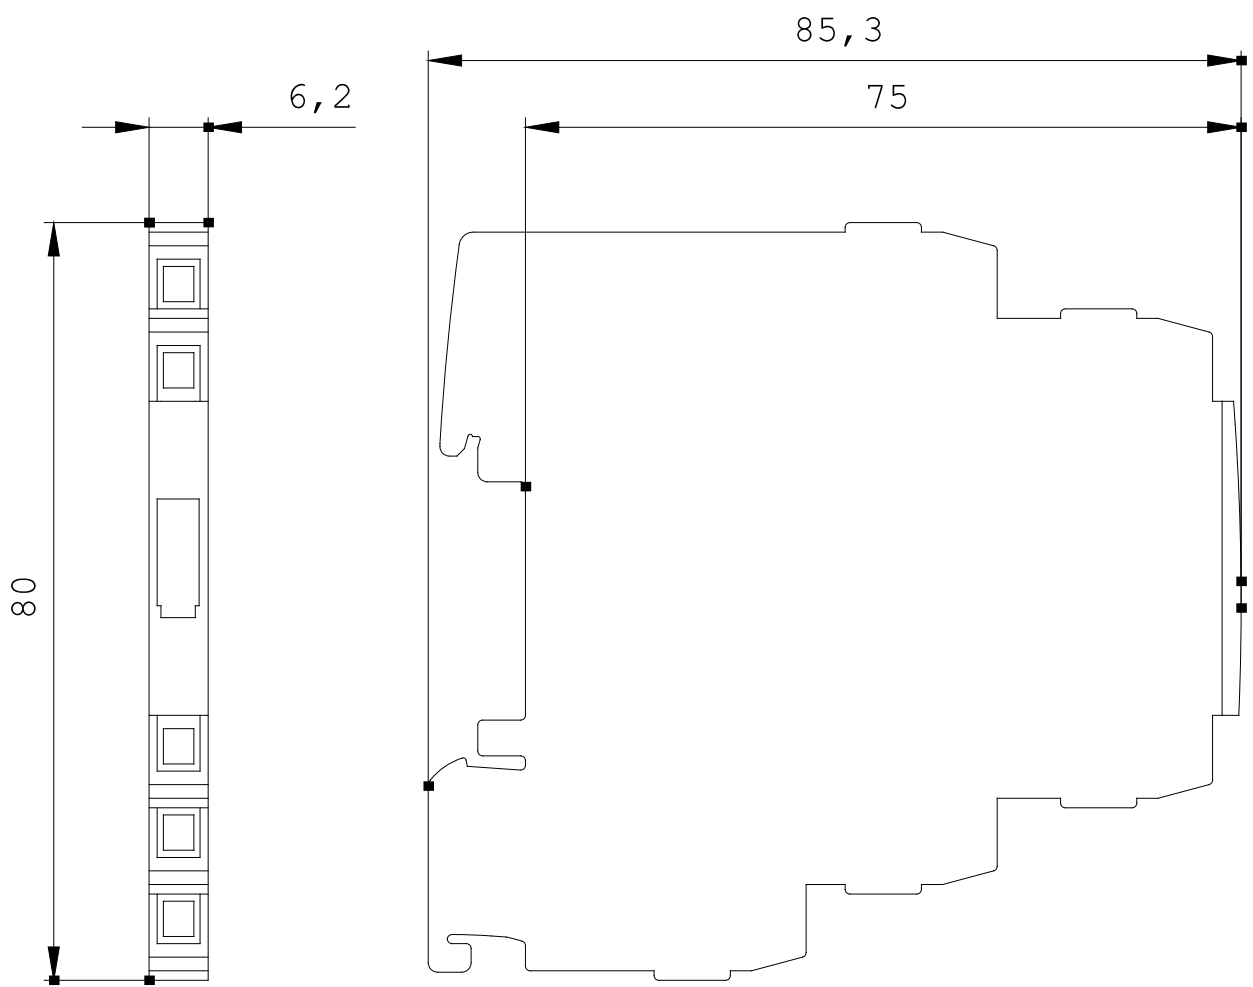

last change:

Jun 16, 2014