

AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HP  
(14MM) ACCESSORY FOR 3VA1/2-BREAKER



Model	
product brandname	SENTRON
Product designation	auxiliary switch
General technical data	
Degree of pollution	3
Overvoltage category	III
Voltage	
Tension assignée d'isolement $U_i$	690 V
Tension assignée de tenue aux chocs	6 kV
Rated operational voltage $U_e$ at AC 50 Hz	600 V
Rated operational voltage $U_e$ with DC	250 V
Electricity	
Thermal current	10 A
Operating current	
• at AC-12 / at 12 V	10 A
• at AC-12 / at 24 V	10 A
• at AC-12 / at 48 V	10 A
• at AC-12 / at 110 V	10 A

- at AC-12 / at 230 V
- at AC-12 / at 400 V
- at AC-12 / at 600 V
- at DC-12 / at 12 V
- at DC-12 / at 24 V
- at DC-12 / at 48 V
- at DC-12 / at 110 V
- at DC-12 / at 230 V
- at DC-13 / at 12 V
- at DC-13 / at 24 V
- at DC-13 / at 48 V
- at DC-13 / at 110 V
- at DC-13 / at 220 V
- at AC-15 / at 12 V
- at AC-15 / at 24 V
- at AC-15 / at 48 V
- at AC-15 / at 110 V
- at AC-15 / at 230 V
- at AC-15 / at 400 V
- at AC-15 / at 600 V

10 A  
6 A  
2 A  
6 A  
6 A  
2 A  
0.6 A  
0.3 A  
3 A  
3 A  
0.8 A  
0.2 A  
0.1 A  
6 A  
6 A  
6 A  
6 A  
6 A  
2 A  
0.6 A

### Mechanical Design

Height	56 mm
Width	14 mm
Width / Note	2 slots (14 mm)
Depth	30 mm
Net weight	40 g
Wire stripping length	15 mm
Wire stripping length [in]	0.6 in

### Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
 CCC		 RCM	 EG-Konf.	<a href="#">Typprüfbescheinigung/Werkszeugnis</a> <a href="#">sonstig</a>

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9988-0AA11>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3VA9988-0AA11/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9988-0AA11](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0AA11)

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

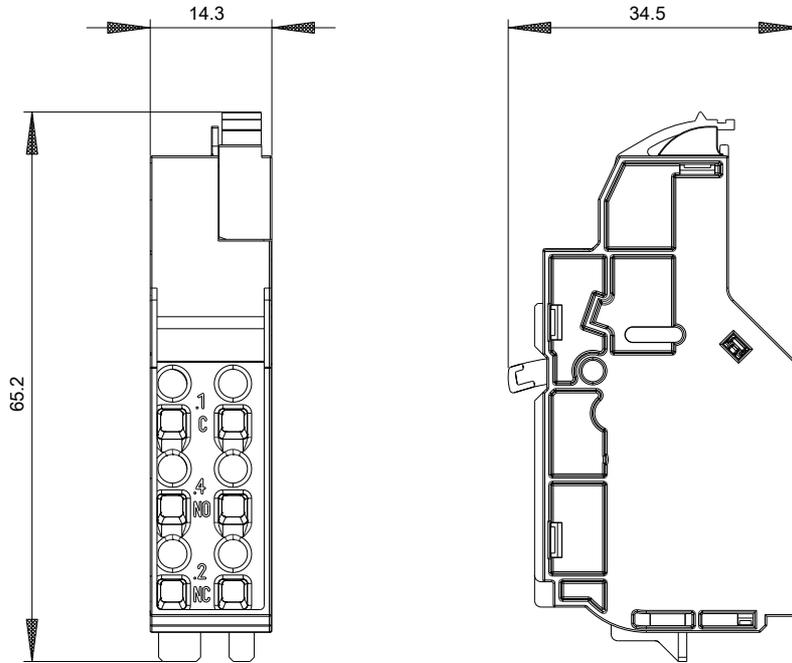

AUX

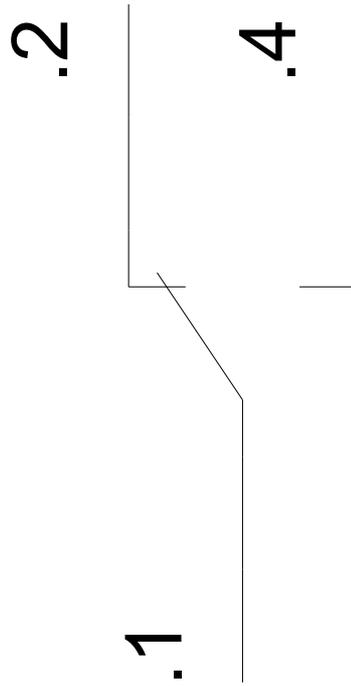

last modified:

11/14/2016