# Product data sheet
## Characteristics

# LE3D18U7A05
## TeSys LE - enclosed star-delta starter - 18 A - 240 V AC coil - reset

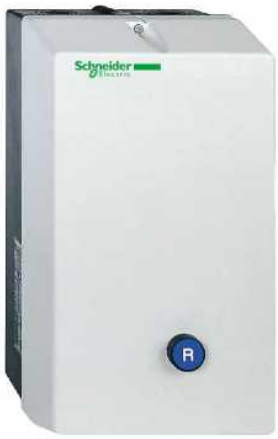

### Main

| | |
|---|---|
| Range of product | TeSys |
| Product name | LE |
| Device short name | LE3D |
| Product or component type | Enclosed star-delta starter |
| Device application | Standard |
| Material | Polycarbonate |
| Utilisation category | AC-3 |
| Device composition | Mechanical interlock<br>Thermal overload relay ordered separately<br>Star-delta contactors |
| Motor power kW | 18.5 kW at 380/400 V AC 50/60 Hz<br>22 kW at 440 V AC 50/60 Hz<br>22 kW at 415 V AC 50/60 Hz<br>11 kW at 220 V AC 50/60 Hz |
| [Uc] control circuit voltage | 240 V AC 50/60 Hz |
| Control type | Pushbutton reset blue R |

### Complementary

| | |
|---|---|
| Cable entry number | 2 cable entry :ISO40 bottom<br>2 cable entry :ISO32 bottom<br>2 cable entry :ISO25 bottom<br>2 cable entry :ISO20 bottom<br>2 cable entry :ISO40 top<br>2 cable entry :ISO32 top<br>2 cable entry :ISO25 top<br>2 cable entry :ISO20 top |
| Width | 186 mm |
| Height | 348 mm |
| Depth | 175.5 mm |
| Product weight | 3.75 kg |

### Environment

| | |
|---|---|
| IP degree of protection | IP65 conforming to IEC 60529 |
| IK degree of protection | IK07 conforming to IEC 60529 |
| Standards | IEC 60947-4-1 |
| Ambient air temperature for operation | -5...40 °C |

### Offer Sustainability

| | |
|---|---|
| Sustainable offer status | Not Green Premium product |
| RoHS | Compliant - since 0844 - Schneider Electric declaration of conformity |
| Product end of life instructions | Need no specific recycling operations |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.