

CONTACTOR SIZE 14, 3-POLE, AC-3, 335KW, 400/380V (690V)
AUX. SWITCH 44 (4NO+4NC) AC OPERATION 500...600V AC
50/60HZ W/O SURGE SUPPRESSOR IN MAIN CIRCUIT



Figure similar

General technical data:	
Size of contactor	14
Protection class IP on the front	IP00
Ambient temperature during operation	55 ... -25 °C
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Equipment marking acc. to DIN EN 61346-2	Q
Main circuit:	
Number of poles for main current circuit	3
Operating current at AC-1 at 400 V • at ambient temperature 40 °C rated value	700 A
Number of NC contacts for main contacts	0
Number of NO contacts for main contacts	3
Operating current at AC-3 at 400 V rated value	630 A
Operating power • at AC-1 at 400 V rated value • at AC-3 at 400 V rated value	415 kW 335 kW

Control circuit/ Control:	
Control version of the switch operating mechanism	conventional
Type of voltage of the control supply voltage	AC
Control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Control supply voltage	
• at AC	
— at 50 Hz	
— rated value	500 ... 600 V
— at 60 Hz	
— rated value	500 ... 600 V

Auxiliary circuit:	
Number of NC contacts for auxiliary contacts	
• lagging switching	0
• instantaneous contact	4
Number of NO contacts for auxiliary contacts	
• leading contact	0
• instantaneous contact	4

Connections/ Terminals:	
Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Identification number and letter for switching elements	44

Mechanical data:	
Mounting type	screw fixing
Mounting type Side-by-side mounting	Yes
Width	230 mm
Height	232 mm
Depth	237 mm

Certificates/ approvals:	
---------------------------------	--

General Product Approval	Functional Safety/Safety of Machinery
--------------------------	---------------------------------------



CCC



CSA



UR



UL



[Baumusterbescheinigung](#)

Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------------------	---------------------------	-------------------	-------------------

[Baumusterprüfbescheinigung](#)



EG-Konf.

[spezielle Prüfbescheinigungen](#)

[Typprüfbescheinigung/Werkszeugnis](#)



Shipping Approval	other
-------------------	-------



GL



LRS



PRS



RMRS

[sonstig](#)

[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TF6844-0CS7-Z A02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6844-0CS7-Z A02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TF6844-0CS7-Z A02&lang=en

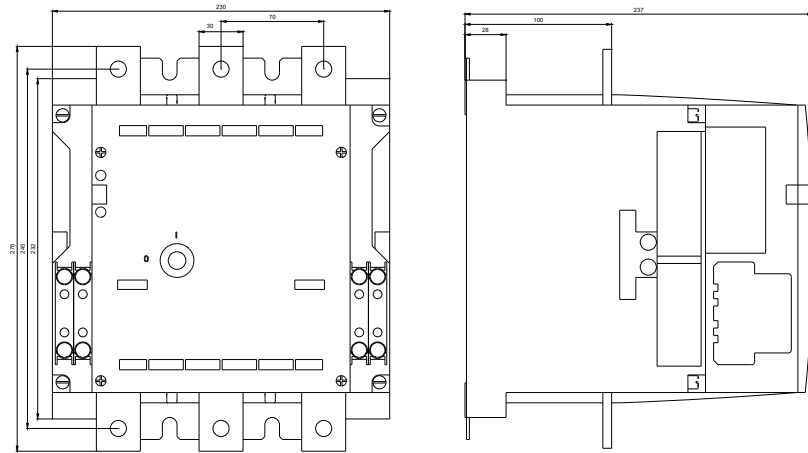

last modified:

10/17/2016