

**SU 10.16IT/04/90MF2 3.5AG BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Male header with middle solder flange fastening in 10.16 pitch for 400-V IT systems according to IEC 61800-5-1. UL approval in compliance with UL840 (600 V) when using leading contact. When used together with the BUZ 10.16 IT, they comply with the expanded requirements for 5.5 mm of touch protection with IT systems (400 V relative to earth), according to IEC 61800-5-1. With its isolated pin tips, the mating profile ensures that more than 1 mm of touch safety is present (also without a socket block) with a finger pressure of 20 N. The middle-flange interlock feature decreases the space required by one pitch width when compared to other standard solutions.

Available on request with screw flange or without flange.

**General ordering data**

|              |                                                                                                                                                                                    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, male header, closed side, Middle flange, THT solder connection, 10.16 mm, Number of poles: 4, 90°, Solder pin length (l): 3.5 mm, silver-plated, black, Box |
| Order No.    | <a href="#">1156690000</a>                                                                                                                                                         |
| Type         | SU 10.16IT/04/90MF2 3.5AG BK BX                                                                                                                                                    |
| GTIN (EAN)   | 4032248943722                                                                                                                                                                      |
| Qty.         | 36 pc(s).                                                                                                                                                                          |
| Product data | IEC: 1000 V / 78.3 A<br>UL: 300 V / 60 A                                                                                                                                           |
| Packaging    | Box                                                                                                                                                                                |

Creation date March 23, 2021 6:55:26 AM CET

**SU 10.16IT/04/90MF2 3.5AG BK BX**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**
**Dimensions and weights**

|            |         |
|------------|---------|
| Net weight | 17.68 g |
|------------|---------|

**System specifications**

|                                              |                                          |                                            |                  |
|----------------------------------------------|------------------------------------------|--------------------------------------------|------------------|
| Product family                               | OMNIMATE Power - series<br>BU/SU 10.16IT | Type of connection                         | Board connection |
| Mounting onto the PCB                        | THT solder connection                    | Pitch in mm (P)                            | 10.16 mm         |
| Pitch in inches (P)                          | 0.4 inch                                 | Outgoing elbow                             | 90°              |
| Number of poles                              | 4                                        | Number of solder pins per pole             | 3                |
| Solder pin length (l)                        | 3.5 mm                                   | Solder pin length tolerance                | +0.1 / -0.3 mm   |
| Solder pin dimensions                        | 1.2 x 1.1 mm                             | Solder pin dimensions = d tolerance        | +0.1 / -0.1 mm   |
| Solder eyelet hole diameter (D)              | 1.6 mm                                   | Solder eyelet hole diameter tolerance (D)  | + 0.1 mm         |
| L1 in mm                                     | 40.64 mm                                 | L1 in inches                               | 1.6 inch         |
| Number of rows                               | 1                                        | Pin series quantity                        | 1                |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch, plugged          | Touch-safe protection acc. to DIN VDE 0470 | IP20 plugged     |
| Volume resistance                            | 2.00 mΩ                                  | Can be coded                               | Yes              |

**Material data**

|                                       |              |                                       |               |
|---------------------------------------|--------------|---------------------------------------|---------------|
| Insulating material                   | PA GF        | Colour                                | black         |
| Colour chart (similar)                | RAL 9011     | Insulating material group             | I             |
| Comparative Tracking Index (CTI)      | ≥ 600        | UL 94 flammability rating             | V-0           |
| Contact material                      | Copper alloy | Contact surface                       | silver-plated |
| Layer structure of solder connection  | ≥ 3 μm Ag    | Layer structure of plug contact       | ≥ 3 μm Ag     |
| Storage temperature, min.             | -40 °C       | Storage temperature, max.             | 70 °C         |
| Operating temperature, min.           | -50 °C       | Operating temperature, max.           | 120 °C        |
| Temperature range, installation, min. | -25 °C       | Temperature range, installation, max. | 120 °C        |

**Rated data acc. to IEC**

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 78.3 A            |
| Rated current, max. number of poles (Tu=20°C)                             | 67.9 A                 | Rated current, min. number of poles (Tu=40°C)                         | 70.6 A            |
| Rated current, max. number of poles (Tu=40°C)                             | 61.3 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 1,000 V           |
| Rated voltage for surge voltage class / pollution degree III/2            | 1,000 V                | Rated voltage for surge voltage class / pollution degree III/3        | 690 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 6 kV                   | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 8 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 8 kV                   | Short-time withstand current resistance                               | 3 x 1s mit 1000 A |

**Rated data acc. to CSA**

|                                   |                                                                                     |                                   |                |
|-----------------------------------|-------------------------------------------------------------------------------------|-----------------------------------|----------------|
| Institute (CSA)                   |  | Certificate No. (CSA)             | 200039-1121690 |
| Rated voltage (Use group B / CSA) | 300 V                                                                               | Rated voltage (Use group C / CSA) | 300 V          |
| Rated voltage (Use group D / CSA) | 600 V                                                                               | Rated current (Use group B / CSA) | 60 A           |
| Rated current (Use group C / CSA) | 60 A                                                                                | Rated current (Use group D / CSA) | 5 A            |
| Reference to approval values      | Specifications are maximum values, details - see approval certificate.              |                                   |                |

## SU 10.16IT/04/90MF2 3.5AG BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to UL 1059

Institute (cURus)



Certificate No. (cURus)

E60693

Rated voltage (Use group B / UL 1059) 300 V

Rated voltage (Use group C / UL 1059) 300 V

Rated voltage (Use group D / UL 1059) 600 V

Rated current (Use group B / UL 1059) 60 A

Rated current (Use group C / UL 1059) 60 A

Rated current (Use group D / UL 1059) 5 A

Clearance distance, min. 8.9 mm

Creepage distance, min. 10.5 mm

Reference to approval values  
Specifications are maximum values, details - see approval certificate.

## Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 40 mm  |
| VPE width | 135 mm | VPE height | 350 mm |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0    | EC002637    |
| ECLASS 9.0  | 27-44-04-02 | ECLASS 9.1  | 27-44-04-02 |
| ECLASS 10.0 | 27-44-04-02 | ECLASS 11.0 | 27-46-02-01 |

## Important note

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Notes          | <ul style="list-style-type: none"> <li>• Additional colours on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• MFX and MSFX: X= Position of the middle flange e.g. MF2, MSF3</li> <li>• For all applications with flange we recommend to fix the pin header with the help of the soldering flange or a self-tapping screw on the board.</li> <li>• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li> </ul> |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

Creation date March 23, 2021 6:55:26 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

### SU 10.16IT/04/90MF2 3.5AG BK BX

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of  
Conformity

[Declaration of the Manufacturer](#)

Engineering Data

[STEP](#)

Engineering Data

[EPLAN, WSCAD](#)


## SU 10.16IT/04/90MF2 3.5AG BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings


### Dimensional drawing

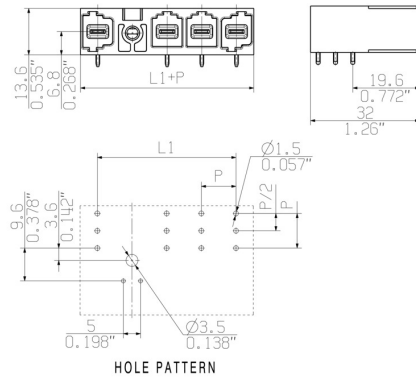

### Connection diagram

|             |                            |   |   |   |   |   |   |   |
|-------------|----------------------------|---|---|---|---|---|---|---|
| 6           | M(S)F6                     | o | o | o | o | o | X | o |
| 6           | M(S)F5                     | o | o | o | o | o | X | o |
| 6           | M(S)F4                     | o | o | o | X | o | o | o |
| 6           | M(S)F3                     | o | o | X | o | o | o | o |
| 6           | M(S)F2                     | o | X | o | o | o | o | o |
| 5           | M(S)F5                     | o | o | o | o | X | o |   |
| 5           | M(S)F4                     | o | o | o | X | o | o |   |
| 5           | M(S)F3                     | o | o | X | o | o | o |   |
| 5           | M(S)F2                     | o | X | o | o | o | o |   |
| 4           | M(S)F4                     | o | o | o | X | o |   |   |
| 4           | M(S)F3                     | o | o | X | o | o |   |   |
| 4           | M(S)F2                     | o | X | o | o | o |   |   |
| 3           | M(S)F3                     | o | o | X | o |   |   |   |
| 3           | M(S)F2                     | o | X | o | o |   |   |   |
| 2           | M(S)F2                     | o | X | o |   |   |   |   |
| No of poles | X = middle flange position | 1 | 2 | 3 | 4 | 5 | 6 | 7 |

### Example of use

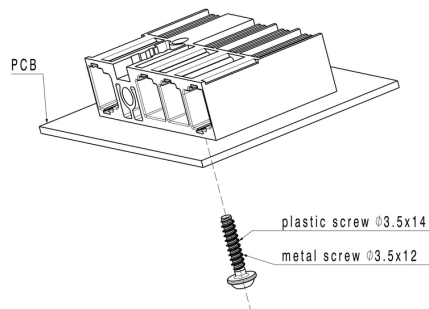

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.