

## SFX 9/40 S MC SDR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Similar to illustration

SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.



## General ordering data

|                    |                                                                                                                                                |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Version            | SlimFix X, Conductor and cable markers, 7 - 40 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, To customer specification |
| Order No.          | <a href="#">1248740000</a>                                                                                                                     |
| Type               | SFX 9/40 S MC SDR                                                                                                                              |
| GTIN (EAN)         | 4050118038996                                                                                                                                  |
| Qty.               | 16 pc(s).                                                                                                                                      |
| compatible printer | <a href="#">2715590000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>                                                               |

## SFX 9/40 S MC SDR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 1 mm       | Depth (inches)  | 0.039 inch |
| Height         | 40 mm      | Height (inches) | 1.575 inch |
| Net weight     | 1.13 g     | Width           | 13.62 mm   |
| Width (inches) | 0.536 inch |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

## General data

|                                   |                                                                      |                                   |                              |
|-----------------------------------|----------------------------------------------------------------------|-----------------------------------|------------------------------|
| Advice label                      | Colour based on customer requirements (Please send M-Print PRO file) | Colour                            | To customer specification    |
| Halogen                           | No                                                                   | Material                          | Polyamide 66                 |
| Number of markers per combination | 1 MultiCard = Conductor and cable markers                            | Operating temperature range       | -40...100 °C                 |
| Operating temperature range, max. | 100 °C                                                               | Operating temperature range, min. | -40 °C                       |
| Printed characters                | Based on customer requirements (Please send M-Print PRO file)        | Size of labelling field           | 40 x 8.5 mm                  |
| UL 94 flammability rating         | V-2                                                                  | Version                           | Installation with cable ties |
| Width                             | 13.62 mm                                                             |                                   |                              |

## Conductor and cable markers

|                               |                    |                                  |                          |
|-------------------------------|--------------------|----------------------------------|--------------------------|
| Conductor O.D.                | 7 - 40 mm          | Conductor O.D., max.             | 40 mm                    |
| Conductor O.D., min.          | 7 mm               | Conductor cross-section, max.    | 500 mm <sup>2</sup>      |
| Conductor cross-section, min. | 16 mm <sup>2</sup> | Cross-section for connected wire | 16 - 500 mm <sup>2</sup> |
| Halogen                       | No                 |                                  |                          |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                              |
|------------------|------------------------------|
| Engineering Data | <a href="#">EPLAN, WSCAD</a> |
|------------------|------------------------------|

### SFX 9/40 S MC SDR

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Example of use

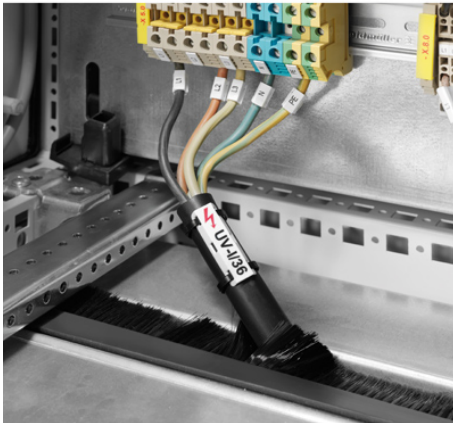

Similar to illustration