



Main

Range of product	Modicon Quantum automation platform
Product or component type	Ethernet network TCP/IP module
Concept	Transparent Ready
Web server	Class D10
Web services	Data editor FactoryCast configurable FactoryCast HMI active Rack viewer
Communication service	Modbus TCP messaging SNMP agent
Communication port protocol	Ethernet Modbus TCP/IP
Physical interface	RJ45 100BASE-FX twisted pair MT/RJ 10BASE-T/100BASE-TX fiber optic
Transmission rate	10/100 Mbit/s

Complementary

Supply	Via the power supply of the rack
Marking	CE
Local signalling	1 LED transmission/reception activity (TxAct/RxAct) 1 LED rack operational (Active) 1 LED network active (Link) 1 LED module ready (Ready) 1 LED full-duplex mode (Fduplex) 1 LED Ethernet network status (RUN) 1 LED Ethernet module fault (Fault) 1 LED download mode (Kernel) 1 LED collision detection (Coll) 1 LED 10 Mbps or 100 Mbps data rate (10 MB/100 MB)
Current consumption	750 mA 5 V DC
Module format	Standard
Product weight	0.345 kg

Environment


IP degree of protection	IP20
Product certifications	CUL UL 508
Standards	CSA C22.2 No 142 FM Class 1 Division 2
Resistance to electrostatic discharge	8 kV on air IEC 801-2 4 kV contact IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 4500 m

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Racks for Modules Mounting

Dimensions of Modules and Racks

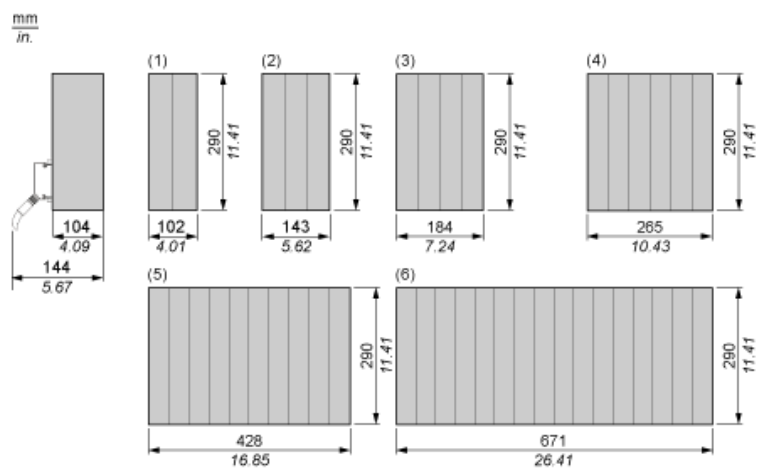

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots