

## CLI M 2-4 GE/SW T CD


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

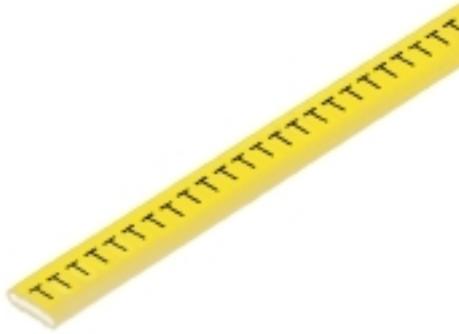

CLI M identification markers are slid onto CLI MH carrier strips and secured by means of cable ties. The system is particularly suitable for large conductor and cable cross-sections.

### Advantages:

- Combination marker for cable and pipe markers
- One size for all diameters above 16 mm<sup>2</sup>
- Unrestricted combination options
- Closed, permanently attached markers
- Very good legibility

### General ordering data

Version	CableLine, Conductor and cable markers, 10 - 317 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, yellow
Order No.	<a href="#">1568301676</a>
Type	CLI M 2-4 GE/SW T CD
GTIN (EAN)	4008190164379
Qty.	500 pc(s).

Creation date March 24, 2021 6:37:10 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**CLI M 2-4 GE/SW T CD**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**
**Dimensions and weights**

Depth	3 mm	Depth (inches)	0.118 inch
Height	4 mm	Height (inches)	0.157 inch
Net weight	0.148 g	Width	11.3 mm
Width (inches)	0.445 inch		

**Temperatures**

Operating temperature range	-30...80 °C
-----------------------------	-------------

**General data**

Colour	yellow	Colour of printing	black
Halogen	Yes	Material	PVC, soft, without Cadmium
Material colour according to resistance code	4	Number of markers per combination	1 Reel = Conductor and cable markers
Operating temperature range	-30...80 °C	Operating temperature range, max.	80 °C
Operating temperature range, min.	-30 °C	Orientation of print	horizontal
Printed characters	Upper-case letters	Printing	T
Printing method	hot-embossing	Recommended industries	Process, Machinery
Type of printing	Standard	UL 94 flammability rating	V-0
Version	CD	Width	11.3 mm

**Conductor and cable markers**

Conductor O.D.	10 - 317 mm	Conductor O.D., max.	317 mm
Conductor O.D., min.	10 mm	Conductor cross-section, max.	500 mm <sup>2</sup>
Conductor cross-section, min.	16 mm <sup>2</sup>	Cross-section for connected wire	16 - 500 mm <sup>2</sup>
Halogen	Yes		

**Classifications**

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">EPLAN, WSCAD</a>
Product Change Notification	<a href="#">PCN CableLine_DE</a> <a href="#">PCN CableLine_EN</a>

**Data sheet**

**CLI M 2-4 GE/SW T CD**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



Similar to illustration