

## FBC PA M12 FM 3M


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

### General ordering data

Version	Bus line, One end without connector, M12, Number of poles: 2, 3 m, Female socket, straight, Shielded: Yes, LED: No, Sheath material: PVC, Halogen: Yes
Order No.	<a href="#">1785110300</a>
Type	FBC PA M12 FM 3M
GTIN (EAN)	4032248658251
Qty.	1 pc(s).

Creation date March 25, 2021 7:47:27 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## FBC PA M12 FM 3M

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Net weight 244 g

### Environmental Product Compliance

REACH SVHC Lead 7439-92-1

### Technical specifications for cable

Bending radius, min., moving	8 x cable diameter		
Bending radius, min., stationary	8 x cable diameter		
Cable length	3 m		
Colour coding	red, green		
Configurable cable length	No		
Core cross-section	1 mm <sup>2</sup>		
Halogen	Yes		
Housing main material	PUR		
Hybrid cable	No		
Insulation	PE		
Irradiation crosslinked	No		
Number of poles	2		
Number of poles	2		
Outer diameter	8.0 ± 0.4 mm		
Outside diameter	8 mm ± 0.4 mm		
Outside diameter	Diameter	8 mm	
	Signs	±	
	Tolerance	0.4 mm	
Resistant to welding beads	No		
Sheath material	PVC		
Sheathing colour	black		
Shielded	Yes		
Suitable for cable carriers	No		
Temperature range, moving	-5...60 °C		
Temperature range, moving, max.	60 °C		
Temperature range, moving, min.	-5 °C		
Temperature range, stationary	-30...80 °C		
Temperature range, stationary, max.	80 °C		
Temperature range, stationary, min.	-30 °C		

### General technical data

Coding	A	Connection thread	M12
Contact surface	Gold-plated	Housing main material	PUR
Insulation strength	10 <sup>8</sup> Ω	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP67	Rated voltage	100 V
Temperature range of housing	-25...+80 °C	Threaded ring material	Brass, nickel-plated
Tightening torque	M12: 0.8 - 1.2 Nm	Version	Female socket, straight
jumpered	No		

### Electrical properties

Insulation strength 10<sup>8</sup> Ω      Rated voltage 100 V

Creation date March 25, 2021 7:47:27 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**FBC PA M12 FM 3M****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Cable structure**

Colour coding	red, green	Insulation	PE
Sheathing colour	black		

**Electrical properties of cable**

Insulation strength	10 <sup>8</sup> Ω
---------------------	-------------------

**Mechanical and material properties of cable**

Halogen	Yes
---------	-----

**Plug, right**

Contact surface	Gold-plated	Housing main material	PUR
Plugging cycles	≥ 100		

**Classifications**

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>


FBC PA M12 FM 3M

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

Drawings


Dimensioned drawing

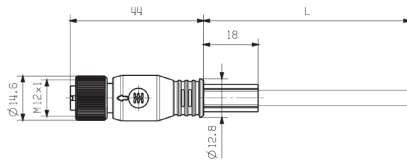

Straight socket

Wiring diagram

Pole scheme

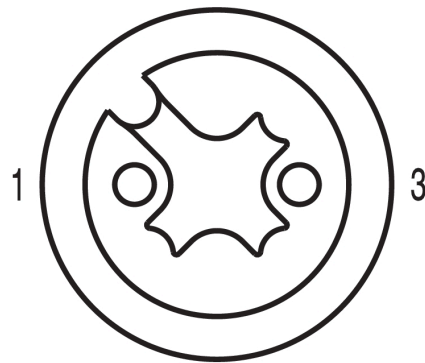

Socket

The ideal tool: Screwty<sup>®</sup> with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F