

SAIS-M23-12P-AN-3,0M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The M23 cables offer: high mating frequency, high current carrying capacity and high-density contacts coupled with minimal dimensions.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Version	Sensor/actuator line, One end without connector, M23, External thread, Number of poles: 12, 3 m, pin, 90°, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
Order No.	1906290300
Type	SAIS-M23-12P-AN-3,0M
GTIN (EAN)	4032248528998
Qty.	1 pc(s).

Creation date March 26, 2021 7:06:28 AM CET

SAIS-M23-12P-AN-3,0M

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	339 g
------------	-------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical specifications for cable

Bending cycles	2 Mio	
Bending radius, min., moving	10 x cable diameter	
Cable length	3 m	
Colour coding	white, green, yellow, grey, pink, red, black, violet, blue, brown, Green/yellow	
Halogen	No	
Housing main material	PUR	
Insulation	TPM	
Number of poles	12	
Number of poles	12	
Outer cladding in accordance with UL AWM style	21198 (80 °C / 300 V)	
Outer diameter	7.7 ± 0.3 mm	
Outside diameter	Diameter	7.7 mm
	Signs	±
	Tolerance	0.3 mm
Outside diameter	7.7 mm ± 0.3 mm	
Resistant to welding beads	No	
Sheath material	PUR	
Sheathing colour	black	
Shielded	No	
Suitable for cable carriers	Yes	
Temperature range, moving	-25...80 °C	
Temperature range, moving, max.	80 °C	
Temperature range, moving, min.	-25 °C	
Temperature range, stationary	-50...80 °C	
Temperature range, stationary, max.	80 °C	
Temperature range, stationary, min.	-50 °C	
Torsion resistance	0 °/m	
Wire cross section	12-pole (8x0.34+3x0.75)/19-pole (16x0.34+3x0.75)	

General technical data

Connection side version	Connection side	1
	Connection thread	M23
	Type of contact	Pin
	Type of thread	External thread
	Outlet direction	angled
Connection side version 1	M23, Pin, External thread, angled	
Connection thread	M23, External thread	
Contact surface	Gold-plated	
Housing main material	PUR	
Insulation strength	10 ¹² Ω	
LED	No	
Plugging cycles	≥ 50	
Pollution severity	2	
Protection degree	IP67	

Creation date March 26, 2021 7:06:28 AM CET

SAIS-M23-12P-AN-3,0M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data**

Rated current	8 A
Rated voltage	120 V
Temperature range of housing	-25...+80 °C
Threaded ring material	Diecast zinc
Tightening torque	M23: 2.5 Nm
Version	pin, 90°
jumpered	No

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Engineering Data	EPLAN, WSCAD
------------------	------------------------------


SAIS-M23-12P-AN-3,0M

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

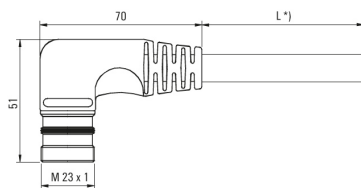


Male, angled

Wiring diagram

1	white
2	green
3	yellow
4	grey
5	pink
6	red
7	black
8	violet
9	- blue
10	- blue
11	+ brown
12	green/yellow

Pole scheme

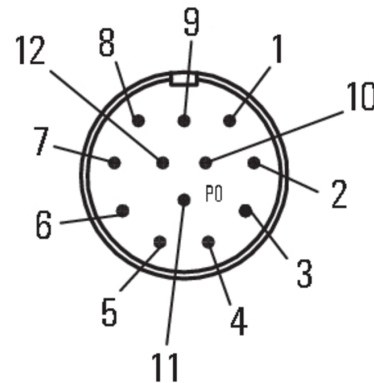

Male

The ideal tool: Screwty[®] with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F