

VPU AC I 3+1 R 440/25 LCF


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

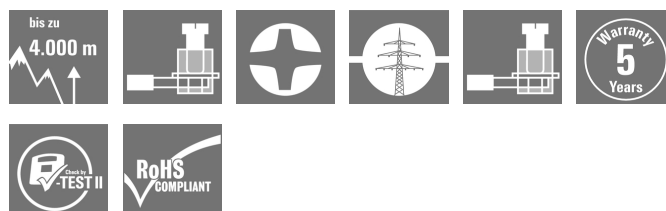

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection, with remote contact, TN-C-S, TN-S, TT, $U_p(L/N-PE) \leq 2.5 \text{ kV}$
Order No.	2619260000
Type	VPU AC I 3+1 R 440/25 LCF
GTIN (EAN)	4050118630688
Qty.	1 pc(s).

VPU AC I 3+1 R 440/25 LCF

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	93 mm	Depth (inches)	3.661 inch
Height	104.5 mm	Height (inches)	4.114 inch
Net weight	25 g	Width	144 mm
Width (inches)	5.669 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Probability of failure

MTBF	15 Years
------	----------

Rated data UL

Operating altitude	≤ 2000 m
--------------------	----------

Connection data, remote alert

Connection type	Screw connection, pluggable	Cross-section for connected wire, solid core, max.	1.5 mm ²
Cross-section for connected wire, solid core, min.	0.14 mm ²	Stripping length	8 mm

General data

Colour	black	Design	Installation housing; 8 TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	Suitable for	Count-in installation (leakage current free)
UL 94 flammability rating	V-0	Version	Surge protection, with remote contact

Insulation coordination acc. to EN 50178

Operating altitude	≤ 2000 m	Pollution severity	2
Surge voltage category	III		

VPU AC I 3+1 R 440/25 LCF

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data IEC / EN

Discharge current $I_{\max}$ (8/20 μ s) wire-PE	100 kA	Discharge current $I_{\max}$ (8/20 μ s) N-PE	100 kA
Discharge current I_n (8/20 μ s) N-PE	100 kA	Discharge current I_n (8/20 μ s) wire-PE	25 kA
Energy coordination (≤ 10 m)	Type I, Type II, Type III	Follow-on current extinguishing capability I_{fi}	Not available due for technical reasons
Frequency range, max.	60 Hz	Frequency range, min.	50 Hz
Fuse	250 A gL (if back up fuse > 250 A)	Leakage current at U_n	5 μ A
Lightning test current I_{imp} (10/350 μ s) (L-PE)	25 kA	Lightning test current, I_{imp} (10/350 μ s) (N-PE)	100 kA
Low voltage network	TN-C-S, TN-S, TT	Mains voltage	400 V / 690 V
Max. continuous voltage, U_c (AC)	440 V	Max. continuous voltage, U_c (N-PE)	440 V
Number of poles	4	Protection level U_p (typ.)	≤ 2.5 kV
Protection level U_p at I_N (L/N-PE)	≤ 2.5 kV	Protection level U_p at I_N (N-PE)	≤ 2.5 kV
Rated load current I_L	100 A	Rated voltage (AC)	400 V
Requirements category acc. to IEC 61643-11	Type I, Type II	Requirements class, acc. to EN 61643-11	T1, T2
Response time	≤ 25 ns, ≤ 100 ns	Short-circuit current rating I_{SCCR}	50 kA
Signalling contact		Standards	IEC61643-11, EN61643-11, EN60068-2-27:2009, EN60068-2-64:2008, EN60068-2-6:2008
	250 V 1A 1CO	Temporary surge voltage (over-voltage) - TOV	762 V
Suitable for	Count-in installation (leakage current free)		
Voltage type	AC		

Connection data

Wire connection method	Screw connection	Type of connection	Screw connection
Stripping length, rated connection	13 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	3 Nm	Clamping range, rated connection	16 mm ²
Clamping range, min.	6 mm ²	Clamping range, max.	35 mm ²
Wire cross-section, solid, min.	6 mm ²	Wire cross-section, solid, max.	35 mm ²
Wire connection cross section, finely stranded, min.	6 mm ²	Wire connection cross section, finely stranded, max.	35 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	6 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	35 mm ²
Connection cross-section, stranded, min.	6 mm ²	Connection cross-section, stranded, max.	35 mm ²

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05

Important note

Product information	Only applicable to IT power systems where the earth on the distribution transformer is interconnected with the earth on the consumer side (RE=RA in Figure 44.A1 of IEC 60634-4-44:2018). For use in DC applications, please use the fuse of SIBA Type NH2XL aR/aSF DC 1500 V
---------------------	---

VPU AC I 3+1 R 440/25 LCF

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of
Conformity

[EAC VPU SERIES](#)
[Declaration of Conformity](#)
[Declaration of Conformity](#)
[Declaration of Conformity](#)
[Declaration of Conformity](#)

Engineering Data

[STEP](#)

Brochure/Catalogue

[Catalogues in PDF-format](#)


VPU AC I 3+1 R 440/25 LCF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

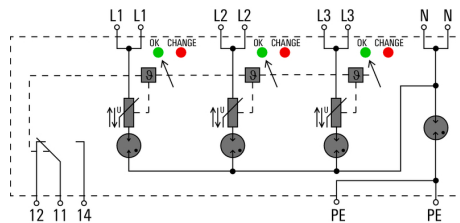

Schematic circuit diagram