



FUSE-SWITCH-DISCONNECTOR 3-POLE, NH2,
400A 60MM BUSBAR SYSTEM COVER LEVEL 32/70 MM
BOX TERMINAL FUSE MONITORING ELECTRONIC,
EFM 10

Similar to image

General technical details:		
Type from device		Zum Aufschnappen auf Sammelschienensystem Siemens 8US 60 mm
mounting position		waagrecht oder senkrecht
Width	mm	209.4
Height	mm	306
Depth	mm	187.6
Center line spacing	mm	60
Busbar design		Sammelschienenendicke 5 oder 10 mm
Continuous current		
• at 40 °C / rated value	A	400
• at 45 °C / rated value	A	392
• at 50 °C / rated value	A	372
• at 55 °C / rated value	A	356
Operational current		
• at AC-21 B		
• at 400 V / rated value	A	400
• at 500 V / rated value	A	400
• at 690 V / rated value	A	400
• at AC-22 B / at 400 V / rated value	A	400

Rated current I_e / maximum / in utilization category		
• AC-22 B		
• at 500 V	A	400
• at 690 V	A	400
• AC-23 B		
• at 400 V	A	400
• at 500 V	A	315
• at 690 V	A	125
• Capacitor		
• at 400 V	A	72
• at 500 V	A	55
Conditional short-circuit current (I_q)		
• at 500 V / with AC / with speedy activation / rated value	kA	80
• at 690 V / with AC / with speedy activation / rated value	kA	50
• with closed switch		
• at 500 V / with AC / rated value	kA	100
• at 690 V / with AC / rated value	kA	100
Insulation voltage / rated value	V	690
Impulse voltage resistance / rated value	kV	8
Tension d'emploi		
• sous AC		
• rated value	V	230 ... 690
Power factor		
• at AC-21 B		0.95
• at AC-22 B		0.65
• at AC-23 B		0.35
• with capacitive load		-0.25
I_{2t} value / with closed switch / maximum permissible	kA ² ·s	2,150
Let-through current		
• with speedy activation / maximum permissible	kA	40
• with closed switch / maximum permissible	kA	40
Design of the load switch / Strip form		No
Fuse system		LV HRC fuse
Installation size of fuse-link		NH1. NH2
Installation size of disconnecting link		2 and 1
Active power loss / maximum	W	34
Design of the safety monitoring		Electronic EFM10
Product component / phase failure monitoring		No
Product extension / optional		

• phase failure monitoring • voltage trigger • overvoltage protection monitoring • locking capability		Yes
		No
		Yes
		Yes
Product component		
• undervoltage release mechanism • undervoltage release with leading contact		No
		No
Product function / overvoltage protection monitoring		No
Product feature / sealable		Yes
Type of the driving mechanism / motor drive		No
Design of the electrical connection / for main current circuit		box terminals
Arrangement of electrical connectors / for main current circuit		sonstige
Conductor cross-section that can be connected / for main contacts		
• solid	mm ²	120 ... 300
• stranded	mm ²	120 ... 300
Type of connectable conductor cross-sections / of laminated conductors / maximum		10 x 32 mm
Tightening torque		
• with screw-type terminals	N·m	10 ... 25
Product extension / auxiliary switch		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		0
Acceptability for application		
• switch disconnecter		Yes
• emergency stop switch		No
• main switch		No
• safety cut-out switch		Yes
• maintenance/repair switch		Yes
Type of mounting		busbar mounting
• Rail installation		Yes
• front mounting		No
• floor mounting		No
Largeur		
• du jeu de barres	mm	12 ... 30
IP degree of protection		
• open		IP20
• with closed switch		
• without cover or cable lug cover		IP30
• with cover or cable lug cover		IP40

Degree of pollution		3
Mechanical operating cycles as operating time / typical		1,000
Item designation / according to DIN EN 61346-2		Q

Ambient conditions:

Ambient temperature

- during operating
- during storage

°C	-25 ... +55
°C	-50 ... +80

Certificates/approvals:

General Product Approval



CCC



GOST



UL



EG-Konf.

Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



DNV



GL



LRS

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/3NP1153-1BC22/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1153-1BC22

CAX-Online-Generator

<http://www.siemens.com/cax>

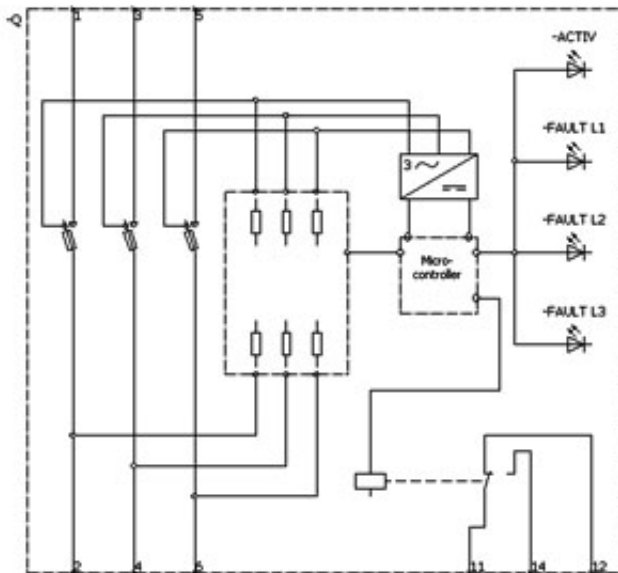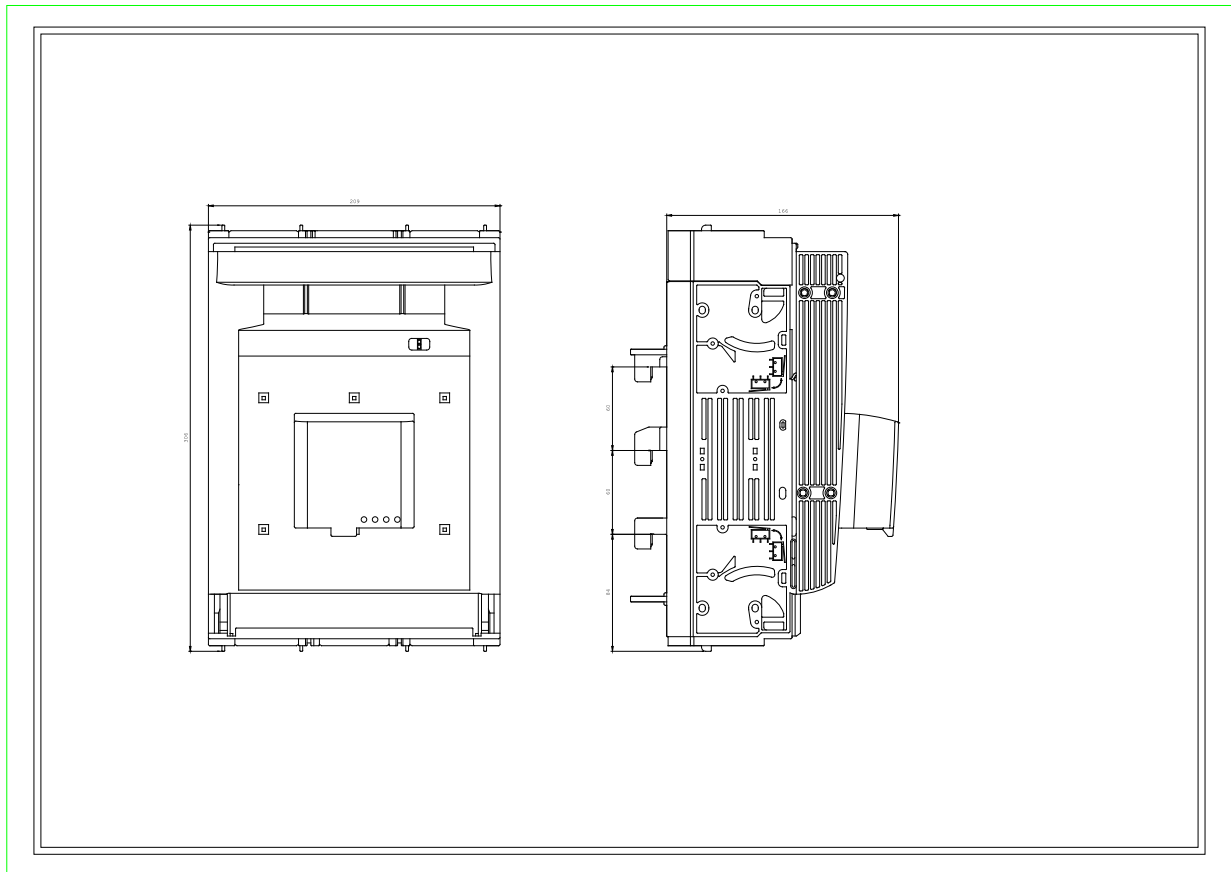

last change:

Nov 2, 2012