


STAR-DELTA COMB. WITH ASI AC3,
5,5KW/400V DC24V, 3-POLE SZ S00,
SPRING-LOADED TERMINAL ELECTR. AND MECH.
INTERLOCK 3NO INTEGR.

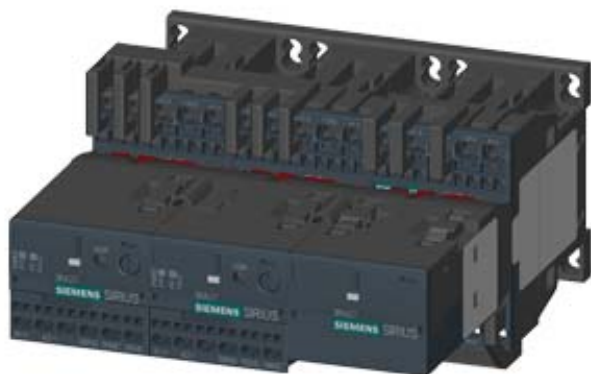

General technical data:

product brand name		SIRIUS
Product designation		star-delta (wye-delta) contactor assembly 3RA24
Product function		wye-delta motor start-up
Size of the contactor		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature - during transport - during storage - during operating	°C	-55 ... +80 -55 ... +80 -25 ... +60
Resistance against shock		9.8g / 5 ms and 5.9g / 10 ms
Impulse voltage resistance / rated value	kV	6
Active power loss / per conductor / typical	W	0.4
Manufacturer article number - of the function module for communication included in the scope of supply 1 / of the contactor included in the scope of supply		3RA2712-2CA00 3RT2015-2BB41-0CC0

• 2 / of the contactor included in the scope of supply • 3 / of the contactor included in the scope of supply • of the RS applied assembly kit		3RT2015-2BB41 3RT2015-2BB41 3RA2913-2BB2
Mechanical operating cycles as operating time • of the main contacts / typical • of the auxiliary contacts / typical • of the contactor / typical • of the contactor with added auxiliary switch block / typical		10,000,000 10,000,000 10,000,000 10,000,000
Communication:		
Product function • bus-communication • control circuit interface with IO link		Yes No
Protocol / is supported / AS interface protocol		Yes
Main circuit:		
Number of poles / for main current circuit		3
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating voltage / at AC-3 / rated value / maximum	V	690
Operating current • at AC-1 / at 400 V • at 40 °C ambient temperature / rated value • at 60 °C ambient temperature / rated value • at AC-2 / at 400 V / rated value • at AC-3 / at 400 V / rated value	A A A A	18 16 12 12
Service power • at AC-2 / at 400 V / rated value • at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value	kW kW kW kW	5.5 5.5 7.2 9.2
Off-load operating frequency	1/h	1,500
Frequency of operation • with AC-1 / maximum • with AC-2 / maximum • with AC-3 / maximum • with AC-4 / maximum	1/h 1/h 1/h 1/h	1,000 1,000 1,000 300
Control circuit:		
Design of activation		conventional

Design of the surge suppressor		with varistor
Voltage type / of control feed voltage		DC
Control supply voltage / 1 • for DC / rated value	V	24
Operating range factor control supply voltage rated value / of the magnet coil • for DC		0.85 ... 1.1
Pull-in power / of the solenoid / for DC	W	5.9
Holding power / of the solenoid / for DC	W	5.9
Resistive loss / of the magnet coil / for DC • typical	W	4

Auxiliary circuit:

Product extension / auxiliary switch		No
Contact reliability / of the auxiliary contacts		< 1 error per 100 million operating cycles
Number of NC contacts / for auxiliary contacts • instantaneous switching • lagging switching		3 0
Number of NO contacts / for auxiliary contacts • instantaneous switching • leading switching		3 0
Operating current / of the auxiliary contacts • at AC-12 / maximum • at AC-15 • at 230 V • at 400 V • at DC-12 • at 48 V • at 60 V • at 110 V • at 220 V • at DC-13 • at 24 V • at 48 V • at 60 V • at 110 V • at 220 V	A A A A A A A A A A A A	10 6 3 6 6 3 1 10 2 2 1 0.3

Short-circuit:

Design of the fuse link • for short-circuit protection of the main circuit		
--	--	--

- with type of assignment 1 / required

- at type of coordination 2 / required

- for short-circuit protection of the auxiliary switch / required

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20 A

fuse gL/gG: 10 A

Installation/mounting/dimensions:

mounting position

+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail

Width

mm 135

Height

mm 84

Depth

mm 145

Distance, to be maintained, to the ranks assembly

- forwards

mm 6

- backwards

mm 0

- upwards

mm 6

- downwards

mm 6

- sideways

mm 6

Distance, to be maintained, to earthed part

- forwards

mm 6

- backwards

mm 0

- upwards

mm 6

- downwards

mm 6

- sideways

mm 6

Distance, to be maintained, conductive elements

- forwards

mm 6

- backwards

mm 0

- upwards

mm 6

- downwards

mm 6

- sideways

mm 6

Connections:

Design of the electrical connection

- for main current circuit

spring-loaded terminals

- for auxiliary and control current circuit

spring-loaded terminals

Type of the connectable conductor cross-section

- for main contacts

- finely stranded

- with conductor end processing

2x (0.5 ... 2.5 mm²)

- without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 2.5 mm²)
1x (20 ... 12)

2x (0.5 ... 1.5 mm²)
2x (0.5 ... 1.5 mm²)
2x (20 ... 14)

Certificates/approvals:

Verification of suitability

CE / UL / CSA / CCC

General Product Approval

Declaration of Conformity

Test Certificates



EG-Konf.

[Special Test Certificate](#)

Shipping Approval



ABS



BUREAU VERITAS



DNV



GL



LRS



PRS

Shipping Approval

other



RINA



RMRS

[other](#)

[Environmental Confirmations](#)

UL/CSA ratings

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

Safety:

B10 value / with high demand rate

- according to SN 31920

1,000,000

Failure rate [FIT] / with low demand rate

- according to SN 31920

FIT

100

Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

75

T1 value / for proof test interval or service life

- according to IEC 61508

a

20

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2415-8XH31-2BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2415-8XH31-2BB4

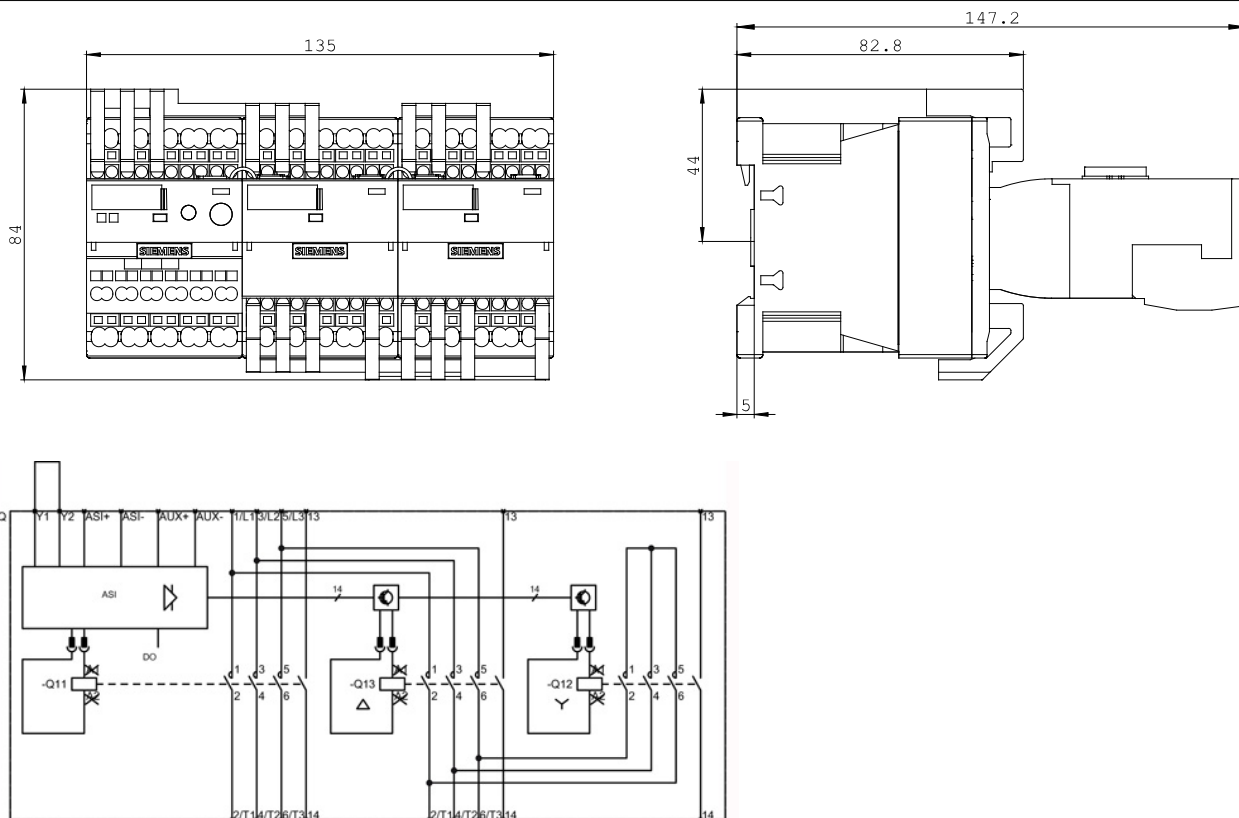

last change:

Aug 4, 2014