

TIME RELAY, SOLID-STATE, ON-DELAY,
1 CHANGEOVER CONTACT,
1 TIME RA 1.5S TO 30S, AC 24,
200 TO 240V AND DC 24V, WITH LED,
SCREW TERMINAL

General technical data:		
product brand name		SIRIUS
Product designation		timing relay
Protection class IP / of the terminal		IP20
mounting position		any
Product function		
• at the relay outputs / changeover delayed/without delay		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-40 ... +85
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +85
Relative humidity		
• during operating phase	%	15 ... 70
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
Impulse voltage resistance / rated value	V	4,000
Active power loss / total / typical	W	2
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
Reference code / according to DIN EN 61346-2		K
Category / according to EN 954-1		none
Protection against electrical shock		finger-safe

Switching Function:

Switching function

• slow-operating		Yes
• making pulse contact		No
• relapse delayed		No
• with control signal		
• additive ON delay		No
• passing break contact		No
• OFF delay		No
• slow-operating/instantaneous contact		No
• with control signal		
• OFF delay/instantaneous		No
• ON delay/OFF delay/instantaneous		No
• making pulse contact/instantaneous contact		No
• with control signal		
• passing break contact/instantaneous		No
• pulse-shaping/instantaneous		No

Adjustable time

s 1.5 ... 30

Control circuit/ Control:

Voltage type / of control feed voltage

AC/DC

Control supply voltage frequency

• 1	Hz	50 ... 60
-----	----	-----------

Control supply voltage

• 1		
• at 50 Hz / for AC / rated value	V	24
• at 60 Hz / for AC / rated value	V	24
• for DC / rated value	V	24
• 2		
• at 50 Hz		
• for AC	V	200 ... 240
• at 60 Hz		
• for AC	V	200 ... 240

Operating range factor control supply voltage rated value

• at 50 Hz		
• for AC		0.85 ... 1.1
• at 60 Hz		
• for AC		0.85 ... 1.1
• for DC		0.85 ... 1.1

Auxiliary circuit:**Operating current / of auxiliary contacts**

• as normally closed contact / for AC-15		
• at 24 V	A	3
• at 250 V	A	3
• as normally open contact / for AC-15		
• at 24 V	A	3
• at 250 V	A	3
• at AC-15		
• maximum	A	3
• at DC-13		
• at 24 V	A	1
• at 125 V	A	0.2
• at 250 V	A	0.1

Number of NC contacts / delayed switching

0

Number of NC contacts / non-delayed

0

Number of NO contacts / delayed switching

0

Number of NO contacts / non-delayed

0

Number of change-over switches / delayed switching

1

Number of change-over switches / non-delayed

0

Short-circuit:**Design of the fuse link / for short-circuit protection of the auxiliary switch / required**

fuse gL/gG: 4 A

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail

Installation/ mounting/ dimensions:**Width** mm 22.5**Height** mm 83**Depth** mm 91**Distance, to be maintained, to the ranks assembly**

• upwards	mm	0
• forwards	mm	0
• sideways	mm	0
• backwards	mm	0
• downwards	mm	0

Distance, to be maintained, to earthed part

• backwards	mm	0
• sideways	mm	0
• upwards	mm	0

• forwards	mm	0
• downwards	mm	0
Distance, to be maintained, conductive elements		
• downwards	mm	0
• backwards	mm	0
• sideways	mm	0
• forwards	mm	0
• upwards	mm	0

Connections/ terminals:

Design of the electrical connection	
• for auxiliary and control current circuit	screw-type terminals

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



[Special Test Certificate](#)

Shipping Approval



Shipping Approval	other
--------------------------	--------------



[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:



Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

Cax online generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3RP1512-1AP30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RP1512-1AP30

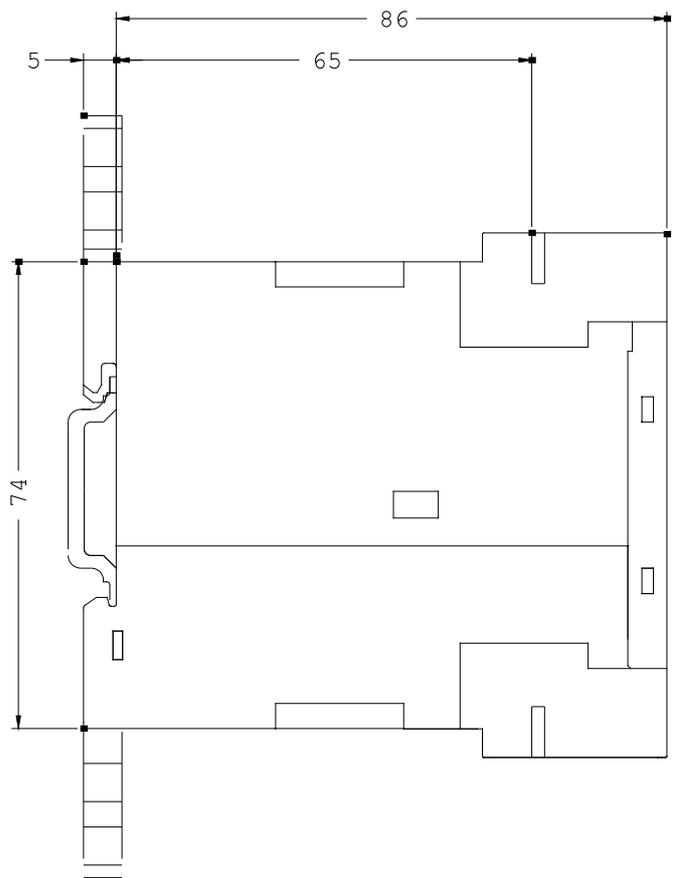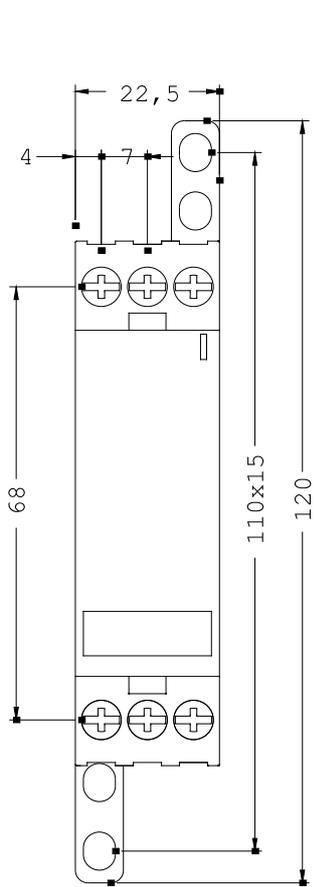

last change:

Jun 16, 2014