



INTERFACE CONVERTER AC/DC 24 V,
2 WAY SEPARATION ON: 0 TO 10 V;
0/4 TO 20 MA OFF: 0...50/100 HZ/1/10 KHZ SPRING
LOADED TERMINAL

General technical details:

product brand name		SIRIUS
Product designation		multi-range converters
Design of the base unit		switchable, active
Number of channels		1
Ambient temperature		
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +85
• during storage	°C	-40 ... +85
Insulation voltage / for overvoltage category III according to IEC 60664 / with degree of pollution 2 / rated value	V	50
Recorded real power	W	0.75
Protection class IP		IP20
Resistance against vibration / according to IEC 60068-2-6		10 ... 55 Hz: 0.35 mm
Shock resistance / according to IEC 60068-2-27		15g / 11 ms
Reference code / according to DIN EN 61346-2		K
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Connections:

Design of the electrical connection		spring-loaded terminals
-------------------------------------	--	-------------------------

Type of the connectable conductor cross-sections		
• solid		1x (0.5 ... 2.5 mm ²)
• finely stranded / with wire end processing		2x (0.5 ... 2.5 mm ²)
• for AWG conductors		
• stranded		2x (20 ... 16)

Galvanic isolation:

Design of the electrical isolation		2 paths
Galvanic isolation		
• between entrance and outlet		Yes
• between the voltage supply and other circuits		No

Supply voltage:

Type of voltage		AC/DC
Supply voltage frequency		
• rated value	Hz	50 ... 60
Supply voltage		
• at 50 Hz / for AC		
• rated value	V	24 ... 24
• at 60 Hz / for AC		
• rated value	V	24 ... 24
• for DC		
• rated value	V	24 ... 24
Working range factor supply voltage rated value		
• at 50 Hz / for AC		0.8 ... 1.2
• at 60 Hz / for AC		0.8 ... 1.2
• for DC		0.7 ... 1.25

Inputs:

Limit frequency	Hz	30
Input voltage / maximum	V	30
Input voltage / typical	V	24

Outputs:

Burden / at the current output / maximum	Ω	400
Burden / at the voltage output / maximum	kΩ	1
Characteristic feature of the output / short-circuit protected		Yes
Overvoltage strength / at the current output / maximum	V	30
Type of signal		
• secondary side		0 ... 50 Hz, 0 ... 100 Hz, 0 ... 1 kHz, 0 ... 10 kHz
• at the input		0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA



Precision:

Relative metering precision	%	0.1
Relative linearity deviation	%	0.02
Temperature drift per °C	%/°C	0.015
Ripple of voltage / maximum	mV	5

Installation/mounting/dimensions:

Mounting type		snap-on mounting on 35 mm DIN rail according to DIN EN 50022
mounting position		any
Height	mm	80
Width	mm	6.2
Depth	mm	84

Certificates/approvals:**General Product Approval****Test Certificates****other**[Special Test Certificate](#)[Declaration of Conformity](#)[Environmental Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RS1705-2KD00/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1705-2KD00

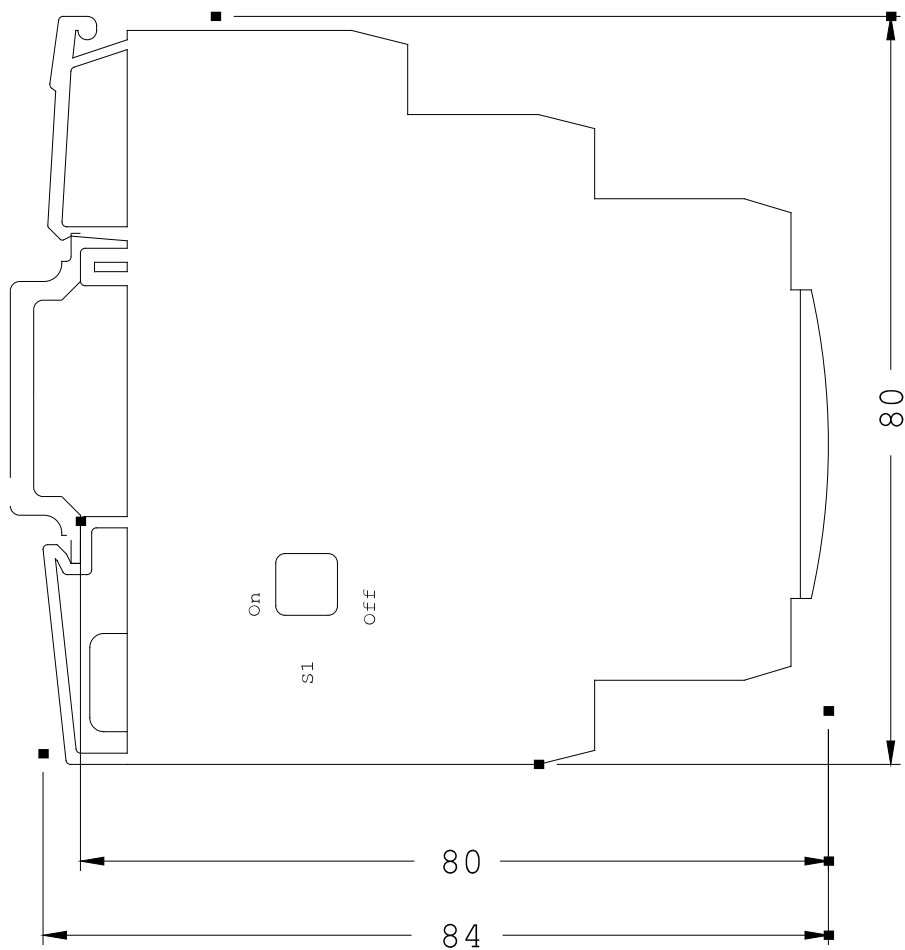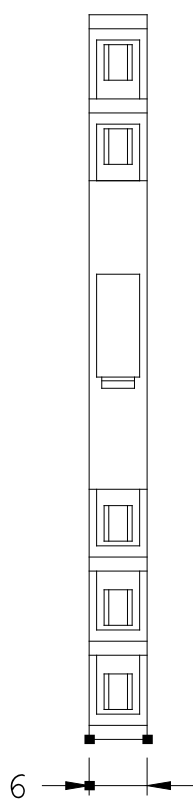

last change:

Jul 28, 2014