



CONTACTOR, 3-POLE, LOW-NOISE,
AC-3,15KW/400V,US=110V 50/60HZ SIZE S2,
CAGE CLAMP CONNECTION WITH ELECTRON.
TRIGGER BLOCK WITH VARISTOR DAMPED

General technical data:		
product brand name		SIRIUS
Size of the contactor		S2
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

Main circuit:		
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	50
• at AC-3 / at 400 V / rated value	A	32
• at AC-4 / at 400 V / rated value	A	29

• with 1 current path / at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	4.5
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	25
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	45
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	35
• at 110 V / rated value	A	2.5
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	25
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	45
Service power		
• at AC-2 / at 400 V / rated value	kW	15
• at AC-3 / at 400 V / rated value	kW	15
• at AC-4 / at 400 V / rated value	W	15,000

Control circuit:		
Design of the surge suppressor		with varistor
Voltage type / of control feed voltage		AC
Operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	12.5
Apparent holding power / of the solenoid / for AC	V·A	18.5
Inductive power factor / with the pull-in power of the coil		0.78
Inductive power factor / with the pull-in power of the coil		0.42

Auxiliary circuit:		
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching		0
Number of NO contacts / for auxiliary contacts / instantaneous switching		0

Short-circuit:**Design of the fuse link**

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
 - with type of assignment 1 / required
 - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 125 A

fuse gL/gG: 63 A

Installation/mounting/dimensions:**Mounting type**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

series installation

Yes

Width

mm

55

Height

mm

142

Depth

mm

130

Distance, to be maintained, to earthed part / sideways

mm

6

Connection type:**Design of the electrical connection**

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

Cage Clamp terminals

Type of the connectable conductor cross-section

- for main contacts
 - solid
 - stranded
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (0.75 ... 16 mm²)2x (0.75 ... 25 mm²)2x (0.75 ... 16 mm²)2x (0.75 ... 16 mm²)


2x (18 ... 2)

2x (0.25 ... 2.5 mm²)2x (0.25 ... 1.5 mm²)2x (0.25 ... 2.5 mm²)

2x (24 ... 14)

Certificates/approvals:

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 EAC	 UL	Type Examination	 EG-Konf.
Test Certificates		Shipping Approval			
Special Test Certificate	 ABS	 GL	 RINA	 RMRS	
other					
Confirmation	other	Environmental Confirmations			
Further information:					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall					
Cax online generator: http://www.siemens.com/cax					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT1034-3XF00-0GA0/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1034-3XF00-0GA0					

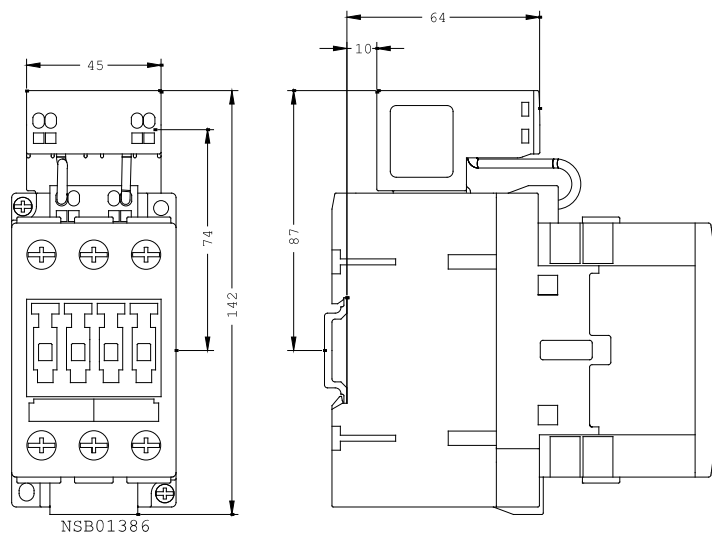

last change:

Jul 28, 2014