



CONTACTOR 1-PH, 140A 24 V DC,
0.7...1.25*US, 3-POLE SIZE S3,
CAGE CLAMP CONNECTION WITH ELECTRON.
TRIGGER BLOCK VARISTOR INTEGRATED

General technical data:

product brand name		SIRIUS
Size of the contactor		S3
Protection class IP / on the front		IP00
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-40 ... +70
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

Main circuit:

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		4
Operating current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	140
• with 1 current path / at DC-1		
• at 24 V / rated value	A	80

- at 110 V / rated value
- with 2 current paths in series / at DC-1
 - at 24 V / rated value
 - at 110 V / rated value
- with 3 current paths in series / at DC-1
 - at 24 V / rated value
 - at 110 V / rated value
- with 1 current path / at DC-3 / at DC-5
 - at 24 V / rated value
 - at 110 V / rated value
- with 2 current paths in series / at DC-3 / at DC-5
 - at 24 V / rated value
 - at 110 V / rated value
- with 3 current paths in series / at DC-3 / at DC-5
 - at 24 V / rated value
 - at 110 V / rated value

A	9
A	80
A	80
A	80
A	80
A	20
A	2.5
A	80
A	80
A	80
A	80

Control circuit:

Design of the surge suppressor

with varistor

Voltage type / of control feed voltage

DC

Operating range factor control supply voltage rated value / of the magnet coil

- for DC

0.7 ... 1.25

Pull-in power / of the solenoid / for DC

W

19

Holding power / of the solenoid / for DC

W

12

Auxiliary circuit:

Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

Number of NC contacts / for auxiliary contacts / instantaneous switching

0

Number of NO contacts / for auxiliary contacts / instantaneous switching

0

Short-circuit:

Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
 - with type of assignment 1 / required
 - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 250 A

fuse gL/gG: 160 A

Installation/mounting/dimensions:

Mounting type

screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail

series installation		Yes
Width	mm	93
Height	mm	144
Depth	mm	191
Distance, to be maintained, to earthed part / sideways	mm	6

Connection type:

Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals
Cage Clamp terminals

Type of the connectable conductor cross-section

- for main contacts
 - solid
 - stranded
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (2.5 ... 16 mm²)
2x (10 ... 50 mm²)

2x (2.5 ... 35 mm²)
2x (10 ... 35 mm²)
2x (10 ... 1/0)

2x (0.25 ... 2.5 mm²)

2x (0.25 ... 1.5 mm²)
2x (0.25 ... 2.5 mm²)
2x (24 ... 14)

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery

Declaration of Conformity



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

Test Certificates

Shipping Approval

[Special Test
Certificate](#)



ABS



GL



RINA



RMRS

other

[Confirmation](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1346-3XB40-0LA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1346-3XB40-0LA2

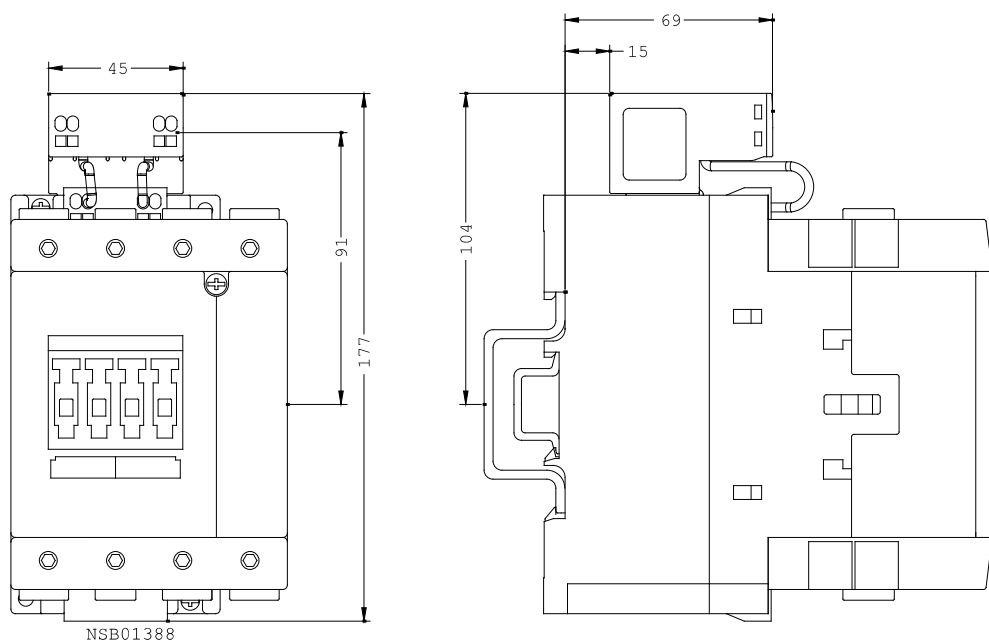

last change:

Jul 28, 2014