

CONTACTOR,AC3:37KW/400V, 2NO+2NC, 230V AC 50HZ, 3-
POLE, SIZE S2, SCREW TERMINAL



Figure similar

product brand name	SIRIUS
Product designation	3RT2 contactor
General technical data:	
Size of contactor	S2
Product extension	
• function module for communication	No
• Auxiliary switch	No
Insulation voltage	
• rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between coil and main contacts acc. to EN 60947-1	400 V
Protection class IP	
• on the front	IP20
• of the terminal	IP00
Shock resistance	
• at rectangular impulse	

— at AC	9.8g / 5 ms, 6.5g / 10 ms
• with sine pulse	
— at AC	15.3g / 5 ms, 10.1g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000

Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Main circuit:

Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating voltage	
• at AC-3 rated value maximum	690 V
Operating current	
• at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	90 A
• at AC-1 up to 690 V	
— at ambient temperature 40 °C rated value	90 A
— at ambient temperature 60 °C rated value	80 A
• at AC-2 at 400 V rated value	80 A
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	25 mm²
• at 40 °C minimum permissible	35 mm²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	30 A
• at 690 V rated value	24 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A

— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
• with 2 current paths in series at DC-3 at DC-5	
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 24 V rated value	55 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
• with 3 current paths in series at DC-3 at DC-5	
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 24 V rated value	55 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
Operating power	
• at AC-1	
— at 230 V rated value	34 kW
— at 230 V at 60 °C rated value	28 kW
— at 400 V rated value	59 kW
— at 400 V at 60 °C rated value	49 kW

— at 690 V rated value	102 kW
— at 690 V at 60 °C rated value	85 kW
• at AC-2 at 400 V rated value	37 kW
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	15.8 kW
• at 690 V rated value	21.8 kW
Thermal short-time current limited to 10 s	640 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	5.7 W
No-load switching frequency	
• at AC	5 000 1/h
Operating frequency	
• at AC-1 maximum	700 1/h
• at AC-2 maximum	350 1/h
• at AC-3 maximum	500 1/h
• at AC-4 maximum	150 1/h

Control circuit/ Control:

Type of voltage of the control supply voltage	AC
Control supply voltage at AC	
• at 50 Hz rated value	230 V
Operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
Apparent pick-up power of magnet coil at AC	
• at 50 Hz	190 V·A
Apparent holding power of magnet coil at AC	
• at 50 Hz	16 V·A
Closing delay	
• at AC	10 ... 80 ms
Opening delay	
• at AC	10 ... 18 ms
Arcing time	10 ... 20 ms

Auxiliary circuit:

Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	2

Number of NO contacts	
• for auxiliary contacts — instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
Operating current at DC-13	
• at 24 V rated value	6 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings:	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	65 A
• at 600 V rated value	62 A
Yielded mechanical performance [hp]	
• for single-phase AC motor — at 110/120 V rated value — at 230 V rated value	5 hp 15 hp
• for three-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	20 hp 25 hp 50 hp 60 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	

Design of the fuse link	
• for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A fuse gL/gG: 10 A
Installation/ mounting/ dimensions:	
Mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
• Side-by-side mounting	Yes
Height	114 mm
Width	55 mm
Depth	174 mm
Required spacing	
• with side-by-side mounting — forwards — Backwards — upwards — downwards — at the side • for grounded parts — forwards — Backwards — upwards — at the side — downwards • for live parts — forwards — Backwards — upwards — downwards — at the side	0 mm 0 mm 0 mm 0 mm 0 mm 10 mm 0 mm 50 mm 6 mm 50 mm 10 mm 0 mm 50 mm 50 mm 6 mm
Connections/ Terminals:	
Type of electrical connection	
• for main current circuit • for auxiliary and control current circuit	screw-type terminals screw-type terminals
Type of connectable conductor cross-sections	
• for main contacts — single or multi-stranded	2x (1 ... 35 mm²), 1x (1 ... 50 mm²)

— finely stranded with core end processing • at AWG conductors for main contacts	2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²) 2x (18 ... 2), 1x (18 ... 1)
Type of connectable conductor cross-sections • for auxiliary contacts — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts	2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) 2x (20 ... 16), 2x (18 ... 14)

Safety related data:

B10 value • with high demand rate acc. to SN 31920	1 000 000
Proportion of dangerous failures • with low demand rate acc. to SN 31920 • with high demand rate acc. to SN 31920	40 % 73 %
Product function • Mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1	Yes No
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates
 CCC	 UL	 EG-Konf.
 CSA	 EAC	Typprüfbescheinigung/Werkzeugzeugnis

Test Certificates	Shipping Approval
spezielle Prüfbescheinigungen	 ABS
 BUREAU VERITAS	 DNV
 GL	 LRS

Shipping Approval	other
 RMRS	Bestätigungen Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT20381AP04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT20381AP04>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT20381AP04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT20381AP04&lang=en

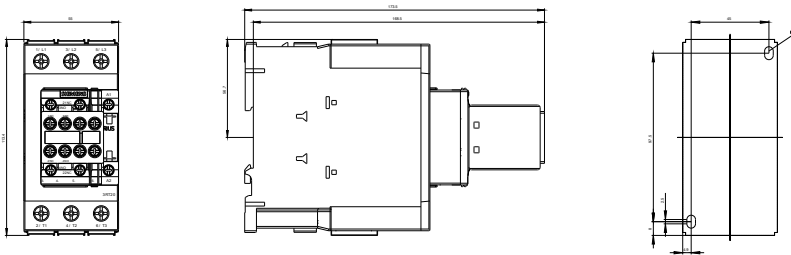

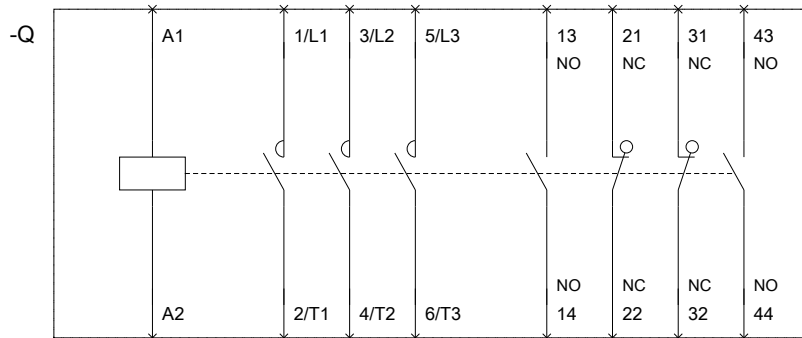

last modified:

09.06.2016