

Contactor, AC-1: 140 A 400 V AC/50 Hz 3-pole, 3 NO, Size S3
Screw terminal 1 NO+1 NC integrated



Figure similar

Product brand name	SIRIUS
Product designation	Contactor
Product type designation	3RT24
General technical data	
Size of contactor	S3
Product extension	
• function module for communication	No
• Auxiliary switch	Yes
Insulation voltage	
• rated value	1 000 V
• Surge voltage resistance of main circuit rated value	8 kV
• Impulse withstand voltage of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation	
• between coil and main contacts acc. to EN 60947-1	690 V
Protection class IP	

• on the front • of the terminal	IP20 IP00
Shock resistance at rectangular impulse	
• at AC	6.7 g / 5 ms, 4.0 g / 10 ms
Shock resistance with sine pulse	
• at AC	10.6 g / 5 ms, 6.3 g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Reference identifier acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Main circuit

Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
• at AC-3 rated value maximum	1 000 V
Operating current	
• at AC-1 at 400 V — at ambient temperature 40 °C rated value	140 A
• at AC-1 — up to 690 V at ambient temperature 40 °C rated value	140 A
— up to 690 V at ambient temperature 60 °C rated value	130 A
• at AC-2 at 400 V rated value	44 A
• at AC-3 — at 400 V rated value	44 A
— at 500 V rated value	44 A
— at 690 V rated value	44 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	50 mm²
• at 40 °C minimum permissible	50 mm²

Operating current	
• at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	130 A 12 A 2.5 A 0.8 A 0.48 A 130 A 130 A 13 A 2.4 A 1.3 A 130 A 130 A 130 A 6 A 3.4 A
Operating current	
• at 1 current path at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	40 A 2.5 A 1 A 0.15 A 0.06 A 110 A 110 A 7 A 0.42 A 0.16 A 110 A 110 A 35 A 0.8 A 0.35 A
Operating power	
• at AC-1 — at 230 V rated value	53 kW

— at 230 V at 60 °C rated value	49 kW
— at 400 V rated value	92 kW
— at 400 V at 60 °C rated value	86 kW
— at 690 V rated value	159 kW
— at 690 V at 60 °C rated value	148 kW
• at AC-2 at 400 V rated value	22 kW
• at AC-3	
— at 230 V rated value	12.7 kW
— at 400 V rated value	22 kW
— at 500 V rated value	29.9 kW
— at 690 V rated value	38.2 kW
No-load switching frequency	
• at AC	5 000 1/h
Operating frequency	
• at AC-1 maximum	650 1/h
• at AC-2 maximum	350 1/h
• at AC-3 maximum	800 1/h
• at AC-4 maximum	150 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage at AC	
• at 50 Hz rated value	400 V
Operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
Apparent pick-up power of magnet coil at AC	
• at 50 Hz	326 V·A
• at 60 Hz	326 V·A
Inductive power factor with closing power of the coil	
• at 50 Hz	0.62
• at 60 Hz	0.55
Apparent holding power of magnet coil at AC	
• at 50 Hz	22 V·A
• at 60 Hz	22 V·A
Inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
• at 60 Hz	0.4
Closing delay	
• at AC	13 ... 50 ms
Opening delay	
• at AC	10 ... 21 ms

Arcing time	10 ... 20 ms
Control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	1
Number of NO contacts	
• for auxiliary contacts	
— instantaneous contact	1
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	52 A
• at 600 V rated value	52 A
Yielded mechanical performance [hp]	
• for three-phase AC motor	
— at 200/208 V rated value	15 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	40 hp

— at 575/600 V rated value	50 hp
Contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
Design of the fuse link - for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required - for short-circuit protection of the auxiliary switch required	gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gR SITOR 3NE: 250 A fuse gG: 10 A
Installation/ mounting/ dimensions	
Mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type Side-by-side mounting	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes
Height	140 mm
Width	70 mm
Depth	152 mm
Required spacing - with side-by-side mounting — forwards — Backwards — upwards — downwards — at the side - for grounded parts — forwards — Backwards — upwards — at the side — downwards - for live parts — forwards — Backwards — upwards — downwards — at the side	0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 10 mm 10 mm 10 mm 0 mm 0 mm 10 mm 10 mm 10 mm
Connections/Terminals	
Type of electrical connection for main current circuit	screw-type terminals

• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections • for main contacts — finely stranded with core end processing • at AWG conductors for main contacts	2x (2.5 ... 35 mm ²), 1x (2.5 ... 50 mm ²) 2x (10 ... 1/0), 1x (10 ... 2)
Connectable conductor cross-section for main contacts • solid • stranded	2.5 ... 16 mm ² 6 ... 70 mm ²
Type of connectable conductor cross-sections • for auxiliary contacts — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts	2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14)

Safety related data

Proportion of dangerous failures • with low demand rate acc. to SN 31920 • with high demand rate acc. to SN 31920	40 % 73 %
Failure rate [FIT] • with low demand rate acc. to SN 31920	100 FIT
Product function • Mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1	Yes No
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates
 CCC  CSA  UL  EAC  EG-Konf.		Type Test Certificates/Test Report

Test Certificates	other	Railway
Special Test Certificate	Confirmation	Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2446-1AV00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2446-1AV00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2446-1AV00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2446-1AV00&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2446-1AV00/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2446-1AV00&objecttype=14&gridview=view1>

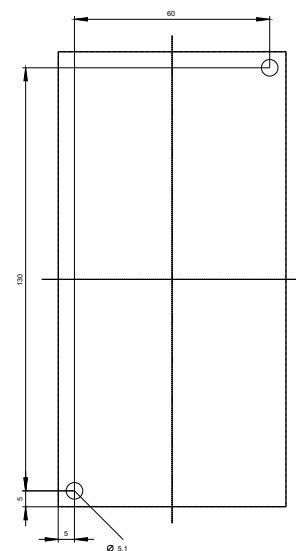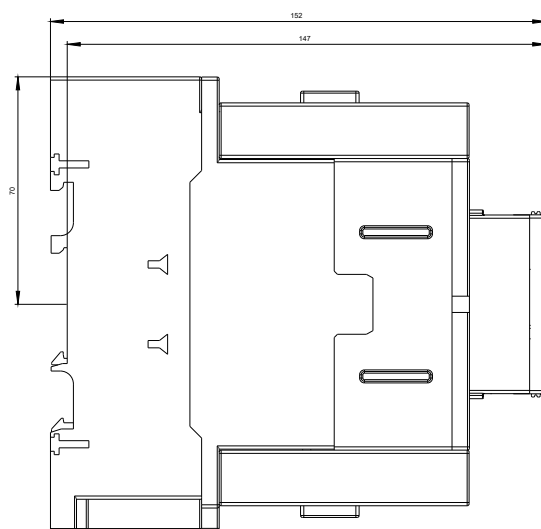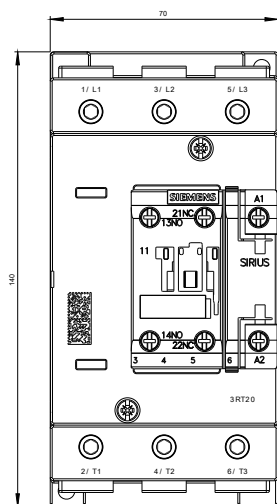

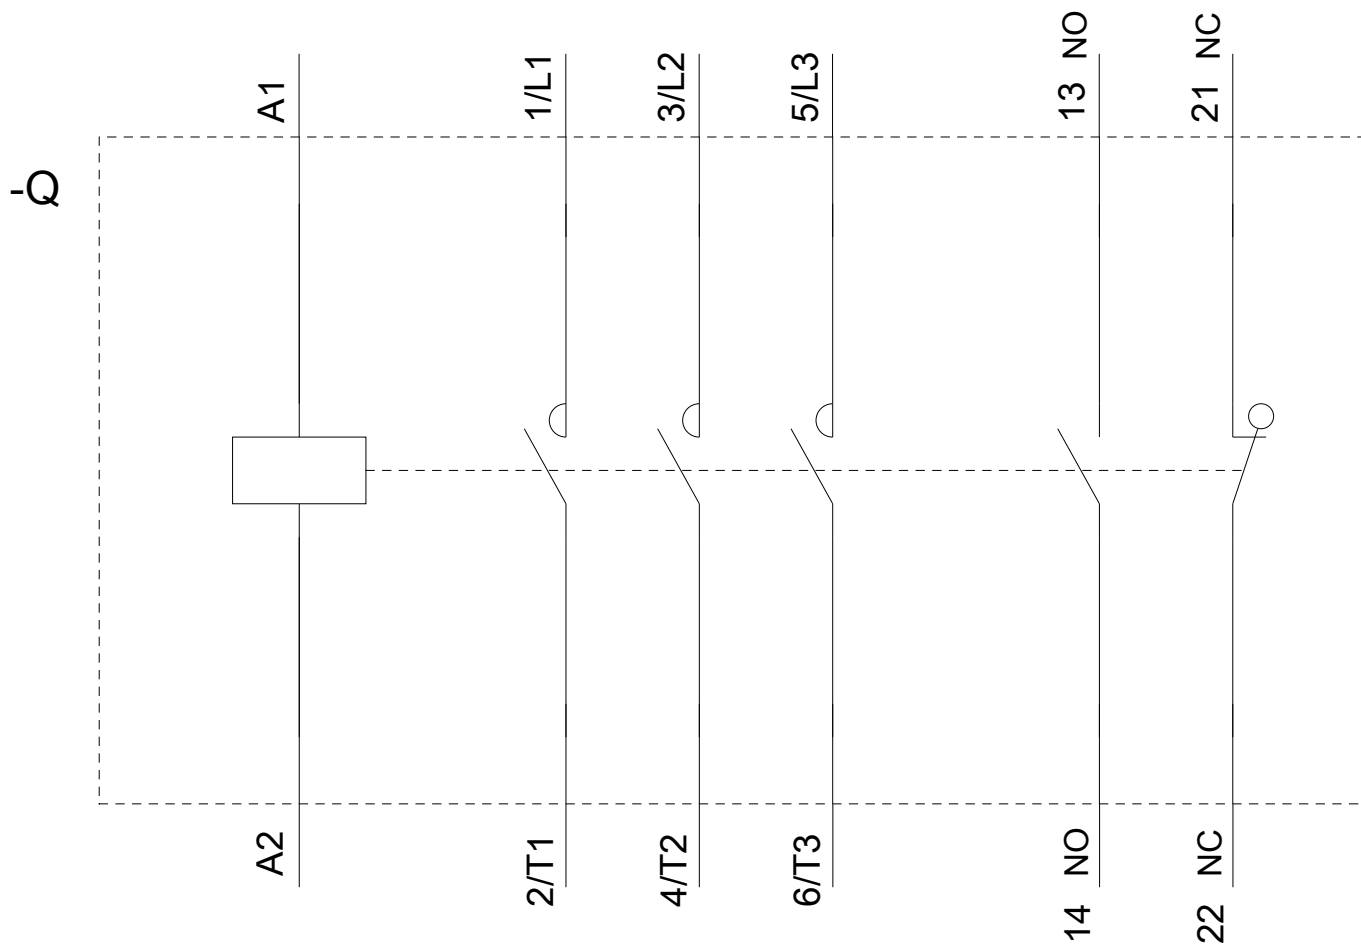

last modified:

03/16/2018