



SIRIUS SOFT STARTER, S12, 432 A,
250 KW/400 V, 40 DEG., 200-460 V AC,
230 V AC, CAGE CLAMP TERMINALS

General details:

product brand name		SIRIUS
Product equipment		
• integrated bridging contact system		Yes
• thyristors		Yes
Product function		
• intrinsic device protection		Yes
• motor overload protection		Yes
• evaluation of thermal resistor motor protection		No
• reset external		Yes
• adjustable current limitation		Yes
• inside-delta circuit		No
Product component / outlet for enine brake		No
Reference code		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		G

Power Electronics:

Product designation		soft starters for standard applications
Operating current		

• at 40 °C / rated value	A	432
• at 50 °C / rated value	A	385
• at 60 °C / rated value	A	335
Emitted mechanical power / for three-phase servomotors		
• at 230 V / at standard switching / at 40 °C		
• rated value	W	132,000
• at 400 V / at standard switching / at 40 °C		
• rated value	W	250,000
yielded mechanical performance (hp) / for three-phase squirrel cage motors / at 200/208 V / at standard circuit / at 50 °C / rated value	hp	125
Operating frequency		
• rated value	Hz	50 ... 60
Relative negative tolerance / of the operating frequency	%	-10
Relative positive tolerance / of the operating frequency	%	10
Operating voltage / with standard circuit / rated value	V	200 ... 460
Relative negative tolerance / of the operating voltage / with standard circuit	%	-15
Relative positive tolerance / of the operating voltage / with standard circuit	%	10
Minimum load in % of I_M	%	20
Adjustable rated current / of the motor / for motor overload protection / minimum	A	207
Continuous operating current in % of I_e / at 40°C	%	115
Active power loss / at operating current / at 40°C / during operating phase / typical	W	165

Control electronics:		
Voltage type / of control feed voltage		AC
Control supply voltage frequency / 1 / rated value	Hz	50
Control supply voltage frequency / 2 / rated value	Hz	60
Relative negative tolerance / of the control supply voltage frequency	%	-10
Relative positive tolerance / of the control supply voltage frequency	%	10
Control supply voltage / 1		
• at 50 Hz / for AC	V	230
• at 60 Hz / for AC	V	230
Relative negative tolerance / of the control supply voltage / at 60 Hz / for AC	%	-15
Relative positive tolerance / of the control supply voltage / at 60 Hz / for AC	%	10
Type of display / for fault signal		red

Mechanical design:		
Size of the engine control device		S12
Width	mm	160
Height	mm	230
Depth	mm	278
Mounting type		screw fixing
mounting position		With additional fan: With vertical mounting surface +/- 90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/- 10° rotatable, with vertical mounting surface +/- 10° t
Distance, to be maintained, to the ranks assembly		
• upwards	mm	100
• sideways	mm	5
• downwards	mm	75
Installation altitude / at a height over sea level	m	5,000
Cable length / maximum	m	300
Number of poles / for main current circuit		3
Electrical connections:		
Design of the electrical connection		busbar connection spring-loaded terminals
• for main current circuit		
• for auxiliary and control current circuit		
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		2
Number of changeover contacts / for auxiliary contacts		1
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using the front clamping point		
• finely stranded / with conductor end processing		70 ... 240 mm²
• finely stranded / without conductor end processing		70 ... 240 mm²
• stranded		95 ... 300 mm²
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using the back clamping point		
• finely stranded / with conductor end processing		120 ... 185 mm²
• without conductor final cutting / without conductor end processing		120 ... 185 mm²
• stranded		120 ... 240 mm²
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using both clamping points		
• finely stranded / with conductor end processing		min. 2x 50 mm², max. 2x 185 mm²
• without conductor final cutting / without conductor end processing		min. 2x 50 mm², max. 2x 185 mm²

• stranded		max. 2x 70 mm ² , max. 2x 240 mm ²
Type of the connectable conductor cross-section / for AWG conductors / for main contacts / for box terminal • when using the back cl • when using the front c • when using both clampi		250 ... 500 kcmil 3/0 ... 600 kcmil min. 2x 2/0, max. 2x 500 kcmil
Type of the connectable conductor cross-section / for DIN cable lug / for main contacts • finely stranded • stranded		50 ... 240 mm ² 70 ... 240 mm ²
Type of the connectable conductor cross-section • for AWG conductors / for main contacts		2/0 ... 500 kcmil
Type of the connectable conductor cross-section • for auxiliary contacts • solid • finely stranded / with conductor end processing • for AWG conductors / for auxiliary contacts		2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (24 ... 16)

Ambient conditions:

Ambient temperature • during operating • during storage	°C	-25 ... +60
	°C	-40 ... +80
Derating temperature	°C	40
Protection class IP		IP00

Certificates/approvals:

General Product Approval			EMC	For use in hazardous locations	
					
CCC	CSA		UL	C-TICK	ATEX
Test Certificates		Shipping Approval		other	
Special Test Certificate					Declaration of Conformity
		DNV	GL	LRS	Environmental Confirmations

UL/CSA ratings

yielded mechanical performance (hp) / for three-phase squirrel cage motors • at 220/230 V / at standard circuit • at 50 °C / rated value • at 460/480 V / at standard circuit	hp	150
--	----	-----

• at 50 °C / rated value

hp

300

Contact rating designation / for auxiliary contacts / according to UL

B300 / R300

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RW4076-2BB44/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW4076-2BB44

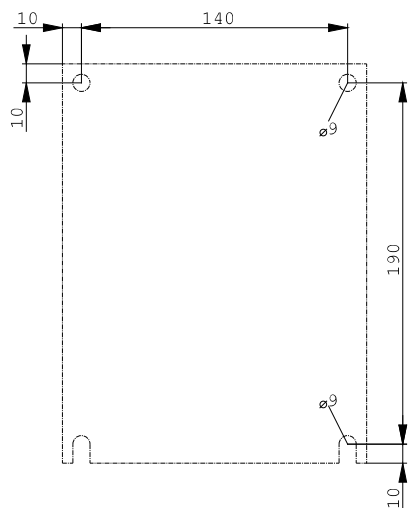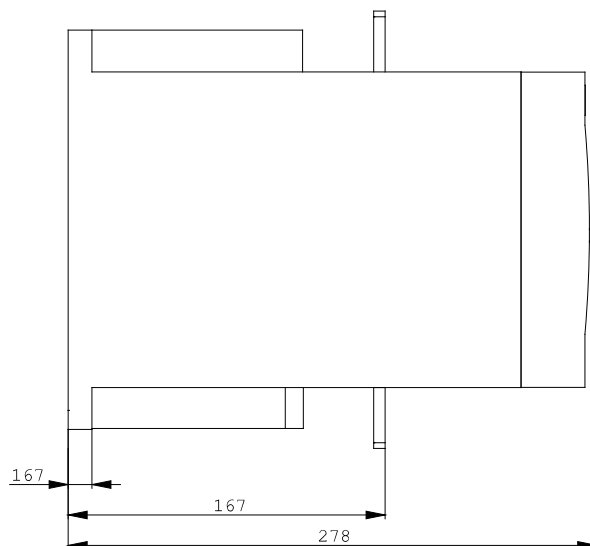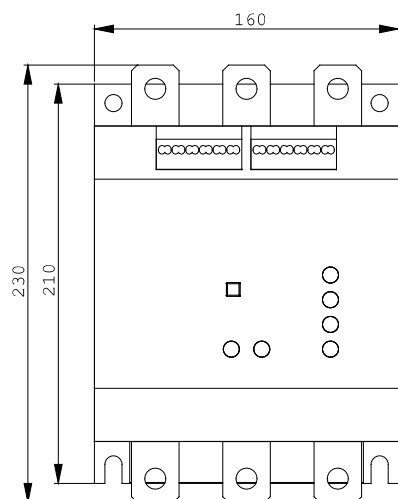

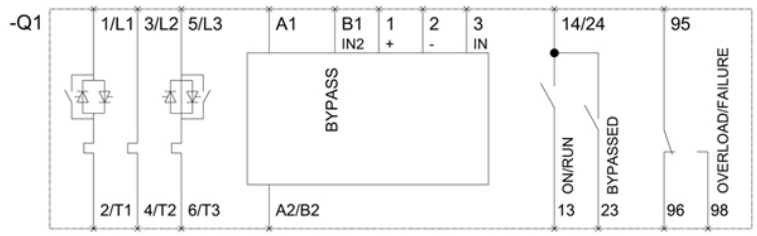

last change:

Jul 7, 2014