



22MM PLASTIC ROUND COMPLETE UNIT  
 COMBINATION: ILLUMINATED PUSHBUTTON WITH FLAT  
 BUTTON ILLUMINATED WITH LAMP HOLDER BA 9S  
 WITH LAMP 24V AC/DC SCREW TERMINAL,  
 1NO+1NC OPERATIONAL VOLTAGE 24V AC/DC WITH  
 HOLDER RED

Actuator:		
Design of the product		Complete unit round
Design of the operating mechanism		Illuminated pushbutton
Functionality / of the actuator		Momentary contact type
Type of unlocking device		without
Color / of the activation element		Red
Material / of the activation element		plastic
Shape / of the activation element		Flat pushbutton
Number of switching positions		2
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Design of the front ring		Standard
Product function / EMERGENCY STOP function		No

Holder:		
Material / of the holder		Plastic

Contact block/ lampholder:		
Design of the electrical connection		screw-type terminals
Number of switching elements		1

<b>Number of NC contacts / for auxiliary contacts</b>		1
<b>Number of NO contacts / for auxiliary contacts</b>		1
<b>Number of changeover contacts / for auxiliary contacts</b>		0
<b>Product function / positive opening</b>		Yes
<b>Number of lampholders</b>		1
<b>Execution of the mounting</b>		BA 9s, with lamp
<b>Product component / fluorescent materials</b>		Yes
<b>Product extension / optional / fluorescent materials</b>		Yes

#### Accessories:

**Product component / holder for 3 switching elements**

Yes

#### General technical data:

<b>Type of voltage / of the supply voltage / of light source</b>		AC/DC
<b>Supply voltage / 1 / of the fluorescent material</b>		
• at 60 Hz / for AC / rated value	V	24
• at 50 Hz / for AC / rated value	V	24
• for DC / rated value	V	24
<b>Voltage type / of operating voltage</b>		AC/DC
<b>Operating voltage / rated value</b>		
• minimum	V	5
• maximum	V	400
<b>Operating current</b>		
• at AC-12		
• at 24 V / rated value	A	10
• at 48 V / rated value	A	10
• at 110 V / rated value	A	10
• at 230 V / rated value	A	10
• at 400 V / rated value	A	10
• at AC-15		
• at 24 V / rated value	A	6
• at 48 V / rated value	A	6
• at 110 V / rated value	A	6
• at 230 V / rated value	A	6
• at 400 V / rated value	A	3
• at DC-12		
• at 24 V / rated value	A	10
• at 48 V / rated value	A	5
• at 110 V / rated value	A	2.5
• at 230 V / rated value	A	1

<ul style="list-style-type: none"> <li>• at DC-13</li> <li>• at 24 V / rated value</li> <li>• at 48 V / rated value</li> <li>• at 110 V / rated value</li> <li>• at 230 V / rated value</li> </ul>	A	3
	A	1.5
	A	0.7
	A	0.3
<b>Resistance against shock</b>		
<ul style="list-style-type: none"> <li>• for devices with incandescent lamp / according to IEC 60068-2-27</li> </ul>		<= 30g
<b>Resistance against vibration / according to IEC 60068-2-6</b>		20 ... 200 Hz: 5g
<b>Operating cycles / maximum</b>	1/h	1,000
<b>Mechanical operating cycles as operating time / typical</b>		3,000,000
<b>Reference code</b>		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> </ul>		S
		S
<b>Tightening torque / of the screws in the bracket / maximum</b>	N·m	1
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operating</li> <li>• during storage</li> </ul>	°C	-25 ... +60
	°C	-40 ... +80
<b>Protection class IP</b>		IP66
<b>climatic class / during the operating phase / according to EN 60721</b>		3K6
<b>Mounting type</b>		front mounting
<b>Shape / of the installation hole</b>		round
<b>Installation width</b>	mm	28.5
<b>Mounting diameter</b>	mm	22
<b>Mounting height</b>	mm	8
<b>Mounting depth</b>	mm	63

#### Certificates/ approvals:

##### General Product Approval



EG-Konf.

[Special Test Certificate](#)

##### Shipping Approval



LRS



PRS



RINA

##### other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3221-0AA21/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SB3221-0AA21](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3221-0AA21)

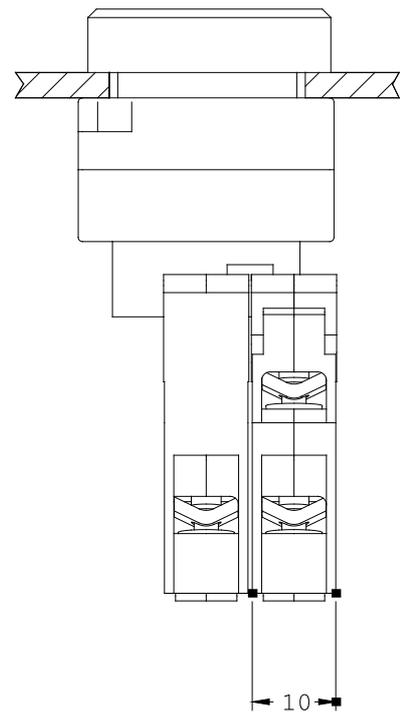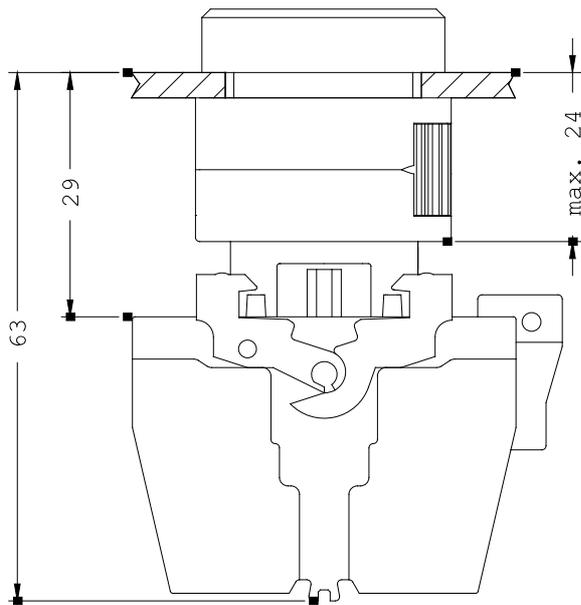

last change:

Jul 7, 2014