



COMPONENT FOR ENCLOSURE,
22MM SUPPORT TERMINAL SPRING-LOADED TERMINAL
BLACK

Contact block/ lampholder:

Product designation		support terminals
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		No
Number of lampholders		0
Design of the electrical connection		spring-loaded terminals

General technical data:

Degree of pollution		class 3
Voltage type / of operating voltage		AC/DC
Reference code		
• according to DIN EN 61346-2		X
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		X
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-25 ... +80
protection type IP		
• of the terminal		IP20

• of the enclosure		IP40
Operating voltage / 1 / at 50 Hz / for AC / rated value	V	400
Operating voltage / 1 / at 60 Hz / for AC / rated value	V	300
Operating voltage		
• 1 / for DC / rated value	V	400
Suitability for integration		
• pressure selection button		Yes
• front element		Yes
• suspension switch		Yes
• suspension pushbutton		Yes
Impulse voltage resistance / rated value	kV	4
Product component		
• fluorescent materials		No
• diode		No
• lamp transformer		No
• series resistance		No
Mounting type		floor mounting
Width	mm	10
Height	mm	49
Depth	mm	28

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
	 EG-Konf.	Confirmation Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3SB3423-2F/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3423-2F

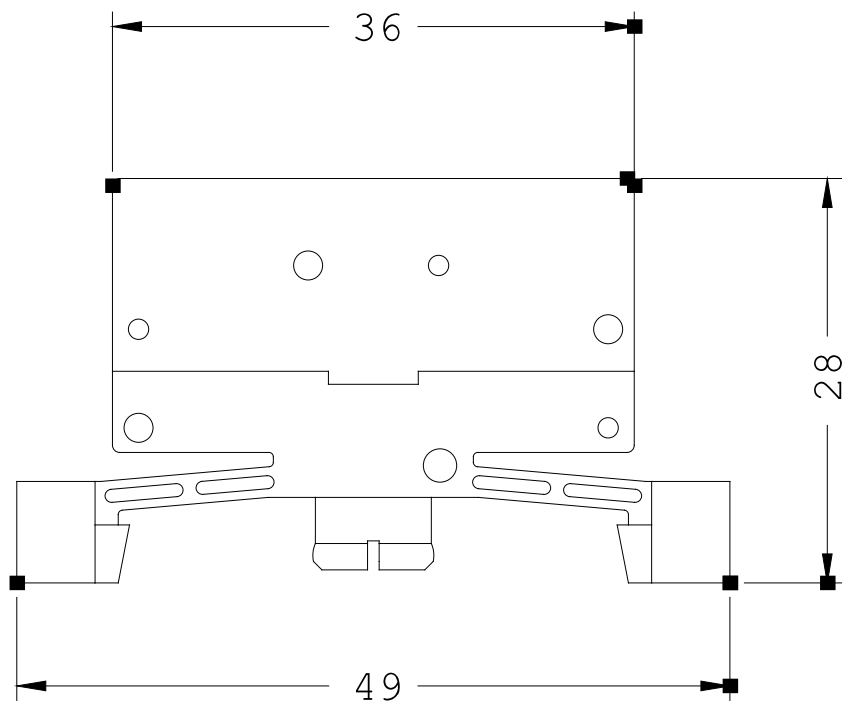

NSD0-01300

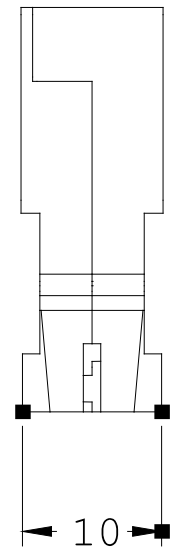

last change:

Jul 7, 2014