

LENGTH-ADJUSTABLE TWIST LEVER FOR POSITION
SWITCH 3SE51/52 STAINLESS STEEL LEVER 100MM
LONG;
WITH STAINLESS STEEL TERMINAL,
STAINLESS STEEL ROLLER 19MM

General technical data:

Product designation		actuator for part-turn actuator
Explosion protection category for dust		none
Mechanical operating cycles as operating time • typical		15,000,000
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating • during storage	°C °C	-25 ... +85 -40 ... +90
Design of the operating mechanism		stainless steel lever, adjustable length, stainless steel roller 19 mm
mounting position		any
Reference code • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		E T

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
 CSA	 EAC	 UL	 EG-Konf.
		Special Test Certificate	Confirmation

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5000-0AA53/all>

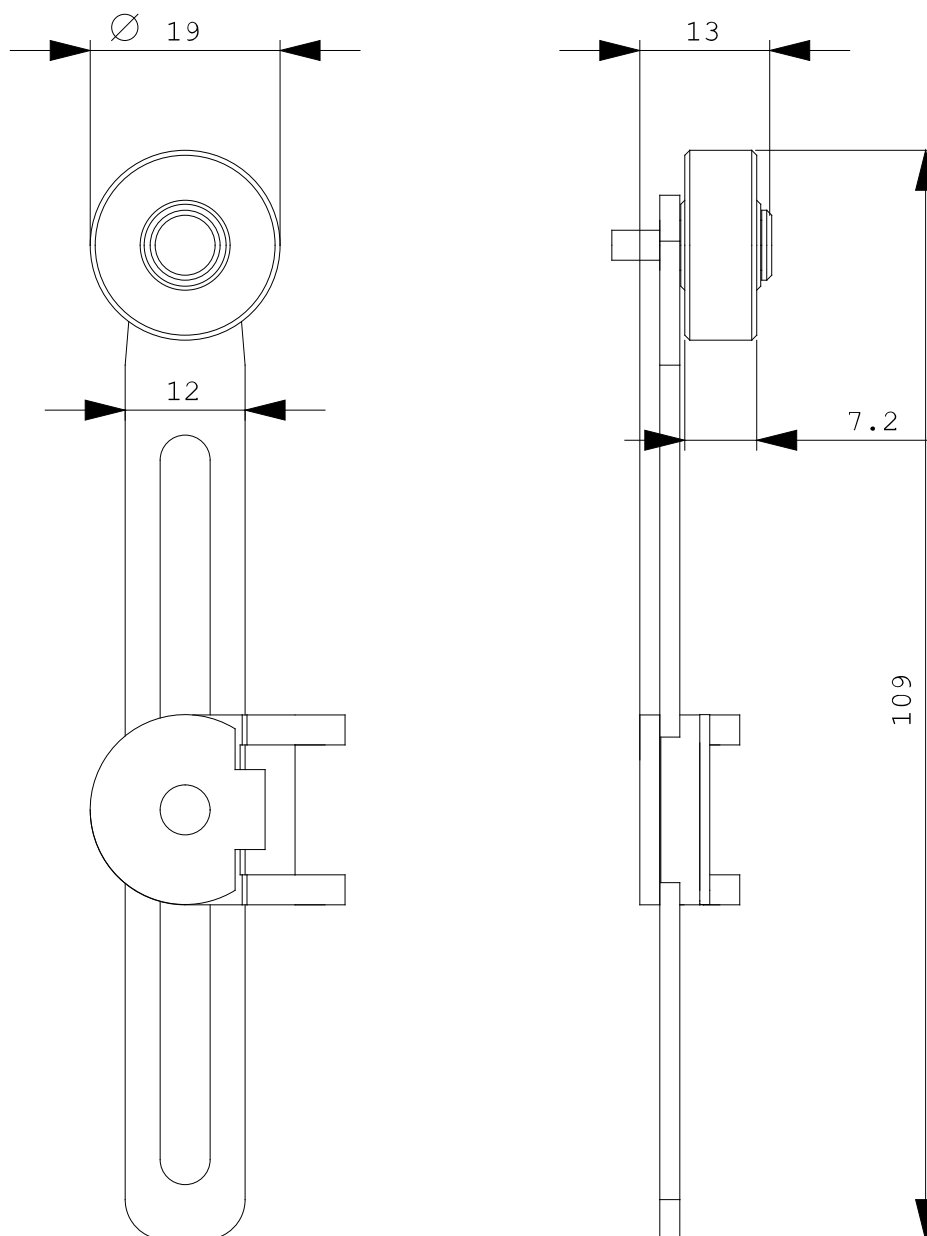

last change:

Jun 16, 2014