

SAFETY POS. SWITCH W. SEPARATE ACTUATOR, METAL ENCLOSURE 40MM, EN 50041, 1NO/2NC SLOW-ACTION CONTACTS W. CONNECTOR 6+PE TO EN43651 PLASTIC; MAX.250V, 6A; 5 DIRECTIONS OF APPROACH PIN ASSIGN.: PIN1=21, PIN2=22, PIN3=13, PIN4=14, PIN5=31, PIN6=32 AND PE CONNECTED, WITH SUITABLE CABLE PLUG 3SY3126

General technical data:		
Product designation		position switch with separate actuator
Explosion protection category for dust		none
Insulation voltage		
• rated value	V	250
Degree of pollution		class 3
Thermal current	A	6
Operating current		
• at AC-15		
• at 24 V / rated value	A	6
• at 125 V / rated value	A	6
• at 230 V / rated value	A	1.5
• at DC-13		
• at 24 V / rated value	A	3
• at 125 V / rated value	A	0.55
• at 230 V / rated value	A	0.27
Continuous current		
• of the slow DIAZED fuse link	A	6
• of the quick DIAZED fuse link	A	6
• of the C characteristic circuit breaker	A	1
Mechanical operating cycles as operating time		
• typical		1,000,000
Electrical operating cycles as operating time		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		1,000,000
• at AC-15 / at 230 V / typical		100,000
Electrical operating cycles in one hour		

• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000
Repeat accuracy	mm	0.05
Design of the contact element		slow-action contacts
Number of NC contacts • for auxiliary contacts		2
Design of the switching function		positive opening
Number of NO contacts • for auxiliary contacts		1
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating • during storage	°C °C	-25 ... +85 -40 ... +90
Product specification • for dimensions		EN 50041
Width of the sensor	mm	40
Material • of the enclosure		metal
Material / of the enclosure / of the switch head		metal
Design of the operating mechanism		5 directions of approach
Actuating speed	mm/s / m/s	0.4 ... 0.5
Minimum actuating force / in activation direction	N	20
Protection class IP		IP65
mounting position		any
Cable gland version		plug, 6-pole + PU, according to EN 43651
Design of the electrical connection		plug, 6-pole + PU, according to EN 43651
Design of the plug-in connection		plug, 6-pole + PU: Pin 1 = terminal 21, Pin 2 = 22, Pin 3 = 13, Pin 4 = 14, Pin 5 = not assigned, Pin 6 = not assigned, PU connected
Manufacturer article number • of the optional actuators		3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical mounting, 3SE5000-0AV03 actuator with horizontal mounting, 3SE5000-0AV04 radius actuator left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator right, 3SE5000-0AV07 heavy-duty actuator, 3SE5000-0AW11 plastic actuator, 3SE5000-0AW21 stainless steel actuator
Reference code • according to DIN 40719 extended according to IEC 204-2 • according to DIN EN 61346-2		S B

Certificates/ approvals:

General Product Approval

Declaration of
Conformity

other



[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5115-0QV10-1AD1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5115-0QV10-1AD1

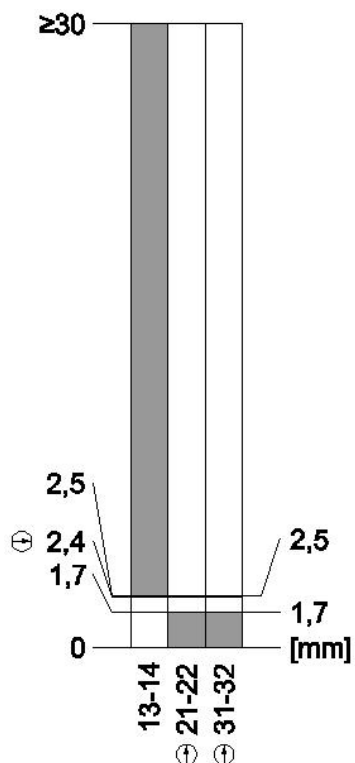

last change:

Jul 24, 2014