

SIRIUS SAFETY RELAY WITH RELAY RELEASE
CIRCUITS (RC),
AC/DC 24V, 22.5MM,
SPRING-LOADED TERMINAL,
RC INSTANT.: 3NO, RC DELAYED: 0NO,
MC: 1NC, AUTOSTART, BASIC DEVICE,
MAX. ACHIEVABLE SIL: 1, PL: C,

General technical details:

product brand name		SIRIUS
product designation		safety relays
Design of the product		for EMERGENCY-STOP units
protection class IP / of the housing		IP40
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	300
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		5 ... 500 Hz: 0,075 mm
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	V	4,000
EMC emitted interference		EN 60947-5-1
Installation environment relating to EMC		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		KT
• according to DIN EN 61346-2		F
Number of sensor inputs		
• 1-channel or 2-channel		1

Design of the cascading		none
Type of the safety-related wiring / of the inputs		single-channel or single-channel and two-channel
Product feature / transverse contact-secure		No
Safety Integrity Level (SIL) • according to IEC 61508		SIL1
SIL claim limit (for a subsystem) / according to EN 62061		1
Performance Level (PL) • according to ISO 13849-1		d
Category / according to EN 954-1		3
Category / according to ISO 13849-1		3
Hardware fault tolerance / according to IEC 61508		1
Safety device type / according to IEC 61508-2		Type A
Probability of dangerous failure per hour (PFHD) / with high demand rate / according to EN 62061	1/h	0.11E-8
Average probability of failure on demand (PFDavg) / with low demand rate / according to IEC 61508	1/y	0.9899999999999999E-6
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching		1 3 0
Number of outputs / as contact-less semiconductor switching element • safety-related • delayed switching • non-delayed • for reporting function • delayed switching • non-delayed		0 0 0 0 0
Stop category / according to DIN EN 60204-1		0

General technical details:

Design of the input • cascading-input/functional switching • feedback input • start input		No Yes Yes
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	1,000
Switching capacity current • of NO contacts of relay outputs		

• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
• of NC contacts of relay outputs		
• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
Thermal current / of the contact-affected switching element / maximum	A	5
Electrical operating cycles as operating time / typical		100,000
Mechanical operating cycles as operating time / typical		10,000,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		gL/gG: 6 A, or quick: 10 A
Resistance to direct current / of the cable / maximum	Ω	30
Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm² and 150 nF/km / maximum	m	1,000
Make time / with automatic start		
• for DC / maximum	ms	200
• for AC / maximum	ms	200
Make time / with automatic start / after mains power cut		
• maximum	ms	300
Backslide delay time / after opening of the safety circuits / typical	ms	125
Backslide delay time / at mains power cut		
• typical	ms	125
• maximum	ms	200
Recovery time / after opening of the safety circuits / typical	ms	200
Recovery time / after mains power cut / typical	s	200
Pulse duration		
• of the sensor input / minimum	ms	200
• of the ON pushbutton input / minimum	s	0.15
Control circuit:		
Type of voltage / of the controlled supply voltage		AC/DC

Control supply voltage frequency • 1 / rated value • 2 / rated value	Hz	50
	Hz	60
Control supply voltage / 1 / for DC / rated value	V	24
Control supply voltage / 1 / at 50 Hz / for AC / rated value	V	24
Control supply voltage / 1 / at 60 Hz / for AC / rated value	V	24
operating range factor control supply voltage rated value / of the magnet coil • at 50 Hz • for AC • at 60 Hz • for AC • for DC		0.85 ... 1.1 0.85 ... 1.1 0.85 ... 1.2

Installation/mounting/dimensions:		
mounting position		any
Type of mounting		screw and snap-on mounting
Width	mm	22.5
Height	mm	120
Depth	mm	120

Connections:		
Design of the electrical connection		spring-loaded terminals
Type of the connectable conductor cross-section • solid • finely stranded • with wire end processing • without wire end processing		2x (0.25 ... 1.5 mm²) 2 x (0.25 ... 1.5 mm²) 2x (0.25 ... 1.5 mm²)
Type of the connectable conductor cross-section / for AWG conductors • solid • stranded		2x (24 ... 16) 2x (24 ... 16)

Product Function:		
Product function • light barrier monitoring • standstill monitoring • protective door monitoring • automatic start • magnetic switch monitoring Normally closed contact-Normally open contact		No No Yes Yes No

• rotation speed monitoring	No
• laser scanner monitoring	No
• monitored start-up	No
• light grid monitoring	No
• magnetic switch monitoring Normally closed contact-Normally closed contact	No
• emergency stop function	Yes
• step mat monitoring	No
Suitability for interaction / pressing control	No
Acceptability for application	
• monitoring of floating sensors	Yes
• monitoring of non-floating sensors	No
• safety cut-out switch	Yes
• position switch monitoring	Yes
• EMERGENCY-OFF circuit monitoring	Yes
• valve monitoring	No
• tactile sensor monitoring	No
• magnetically operated switches monitoring	No
• safety-related circuits	Yes

Certificates/approvals:

Verification of suitability

- TÜV (German technical inspectorate) certificate
- UL-registration
- BG BIA certificate

BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508

Yes

Yes

Yes

General Product Approval

EMC



CCC



CSA



GOST



UL



C-TICK

Functional Safety / Safety of Machinery

Declaration of Conformity

Test Certificates

other



ATEX



VDE



EG-Konf.

[Special Test Certificate](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:

<http://www.siemens.com/cax>

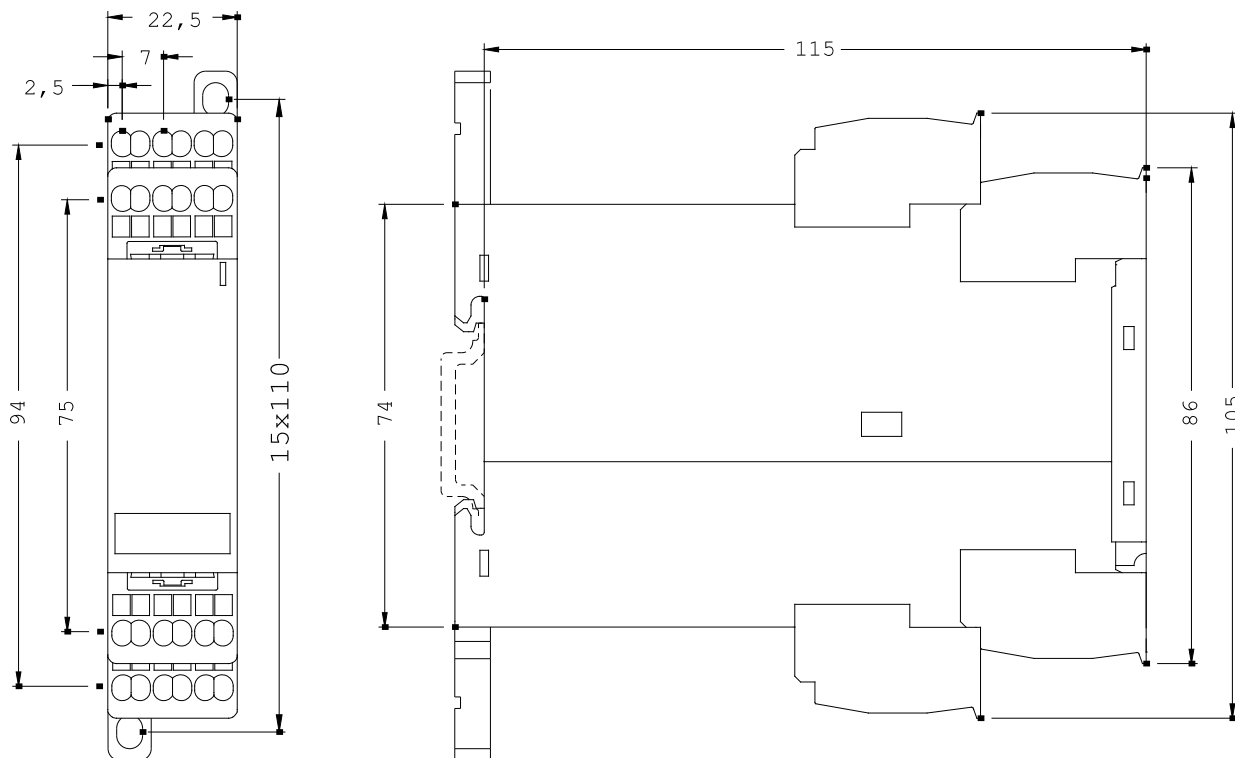

last change:

Feb 18, 2013