



circuit breaker 3VA6 UL frame 1000 breaking capacity class C 100kA @ 480 V 3-pole, line protection ETU330, LIG, In=1000A overload protection Ir=400A ...1000A short circuit protection Ii=1,5...10 x In

Model	
product brand name	SETRON
product designation	Molded-case circuit breaker
product designation / according to UL file	CMNAE
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the overcurrent release	ETU330
protection function of the overcurrent release	LIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	330 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	110 W
mechanical service life (operating cycles) / typical	10 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	4 900
electrical endurance (operating cycles) / at AC-1 / at 690 V	3 400
electrical endurance (operating cycles) / at 480 V	4 900
electrical endurance (operating cycles) / at 600 V	3 400
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
• communication function	No
• other measurement function	No
Net Weight	12.76 kg
Current	
marking / according to UL 489 / 100%-rated breaker	No
operational current	
• at 40 °C	0 A
• at 45 °C	0 A
• at 50 °C	0 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	C
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	200 kA
• at 415 V	110 kA
• at 690 V	35 kA
operating short-circuit current breaking capacity (Ics)	

• at 240 V • at 415 V • at 690 V	150 kA 85 kA 19 kA
short-circuit current making capacity (I _{cm})	
• at 240 V • at 415 V • at 690 V	440 kA 242 kA 74 kA
Switching capacity according to UL 489	
current breaking capacity	
• at 240 V • at 480 V • at 600 V	200 kA 100 kA 50 kA
Adjustable parameters	
adjustable response value setting current (I _r) / of the L-trip / with I _{2t} characteristic	
• minimum • maximum	400 A 1 000 A
adjustable response value delay time (t _r) / for L-tripping / with I _{2t} characteristic	
• minimum • maximum	0.5 s 17 s
adjustable response value setting current (I _i) / for I-tripping	
• minimum • maximum	1 500 A 10 000 A
adjustable current response value current / for G-tripping / with standard characteristic	
• initial value • full-scale value	200 A 1 000 A
adjustable response value delay time (t _g) / for G-tripping / with I _{0t} characteristic	
• minimum • maximum	0.1 s 0.3 s
adjustable absolute value setting current (I _N) / for N-tripping	
• minimum • maximum	0 A 0 A
adjustable current response value current / of instantaneous short-circuit trip unit	
• minimum • maximum	1 500 A 10 000 A
product function / grounding protection	Yes
total break time / for G-tripping / with standard characteristic	
• initial value • full-scale value	0.1 s 0.3 s
Mechanical Design	
product component	
• undervoltage release • voltage trigger • trip indicator	No No No
height [in]	12.91 in
height	328 mm
width [in]	8.27 in
width	210 mm
depth [in]	4.72 in
depth	120 mm
Connections	
arrangement of electrical connectors / for main current circuit	Front connection
type of electrical connection / for main current circuit	nut keeper kit on both ends
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 4 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	50 x 28 mm
Auxiliary circuit	

number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	No
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Certificates	
reference code / according to IEC 81346-2	Q
certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB	Yes
General Product Approval	

[Confirmation](#)







[Miscellaneous](#)


General Product Approval	EMC	Declaration of Conformity	Test Certificates	Marine / Shipping
			Type Test Certificates/Test Report	

Marine / Shipping	other
	Confirmation
	Miscellaneous

other	Dangerous Good
Miscellaneous	Transport Information

Further information Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6610-7HM32-0AA0 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VA6610-7HM32-0AA0 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6610-7HM32-0AA0 CAX-Online-Generator http://www.siemens.com/cax Tender specifications http://www.siemens.com/specifications

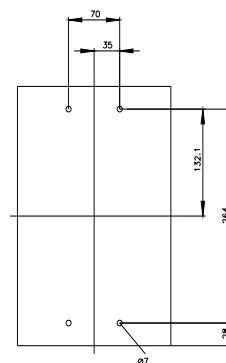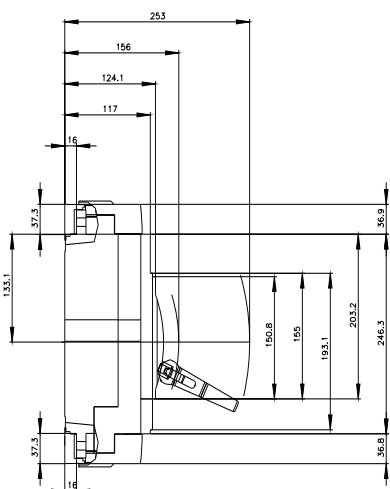

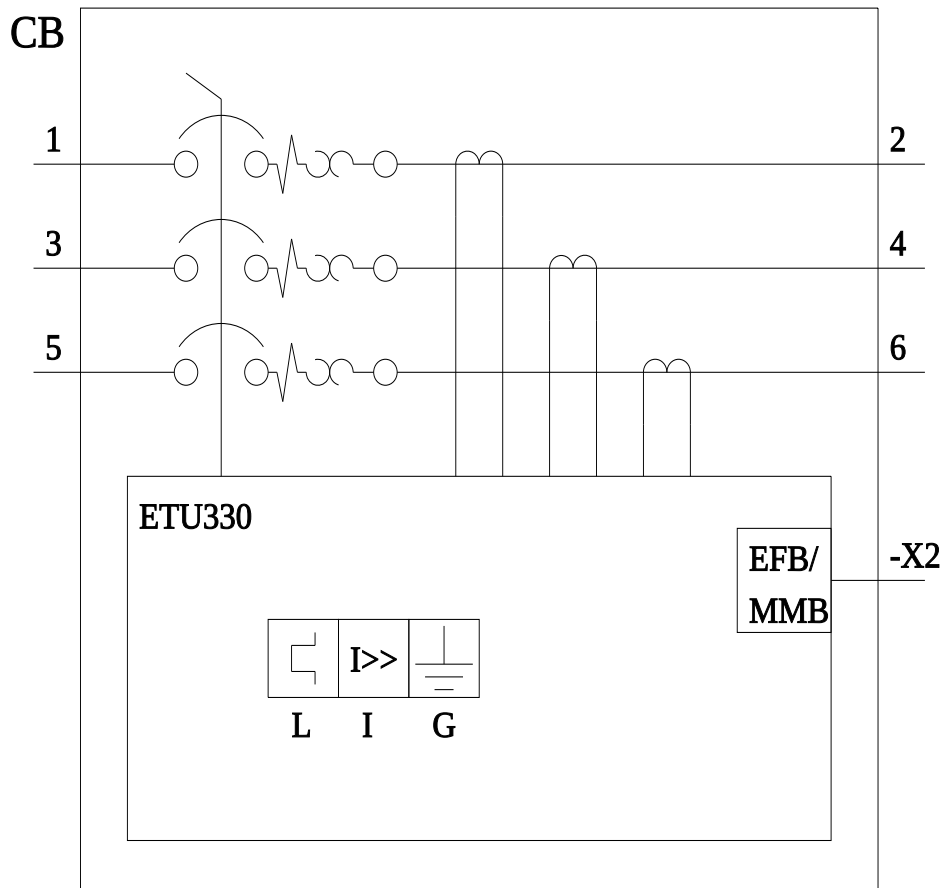

last modified:

7/17/2022

