



Wire Connector with control wire tap; for 2 cables; 3 pcs.; incl.
Terminal Cover Extended with probe holes for voltage test;
accessory for: 3VA5/6 400/600 Plug-in/Draw-out Base 3VA5/6
400/600

Model	
Product brand name	SETRON
Product designation	accessories
Connections according IEC	
IEC-marking / of terminals	70-300 mm ² CU/AL NNL
Connectable conductor cross-section	• for copper cable / stranded / minimum 70 mm² • for copper cable / stranded / maximum 300 mm² • for aluminum cable / stranded / minimum 70 mm² • for aluminum cable / stranded / maximum 300 mm²
Wire stripping length	31 / 58,5 mm
Tightening torque / when using copper cables	42 Nm
• finely stranded	
Connections according UL	

UL-marking / of terminals	TA2.4 CMC 2/0-600 CU7AL UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Wire stripping length	1.2 / 2.3 in
Connectable conductor cross-section • for copper cable / stranded / minimum • for copper cable / stranded / maximum • for copper cable / finely stranded / minimum • for copper cable / finely stranded / maximum • for aluminum cable / stranded / minimum • for aluminum cable / stranded / maximum	2/0 AWG 600 kcmil 2/0 AWG 600 kcmil 2/0 AWG 600 kcmil

Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval
 UL	 EAC	 EG-Konf.	 LRS

[Miscellaneous](#)



other

[Manufacturer Declaration](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9473-0JC28>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9473-0JC28>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)







http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9473-0JC28

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

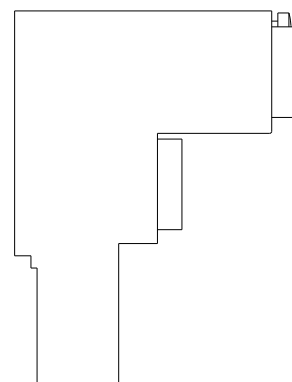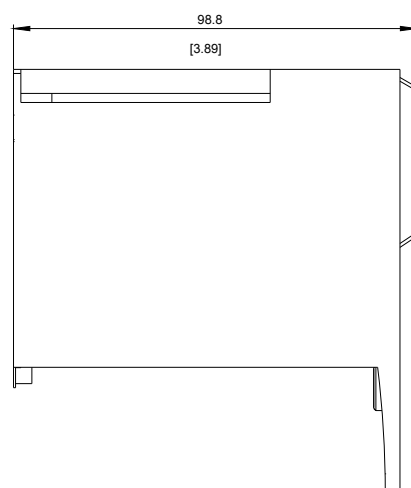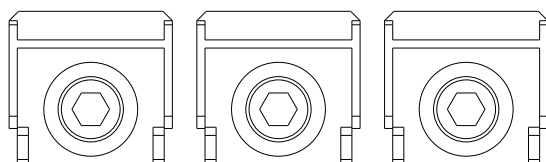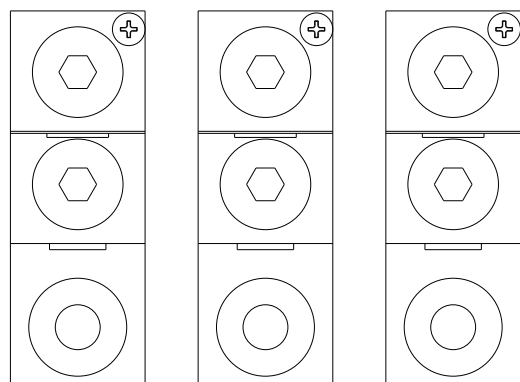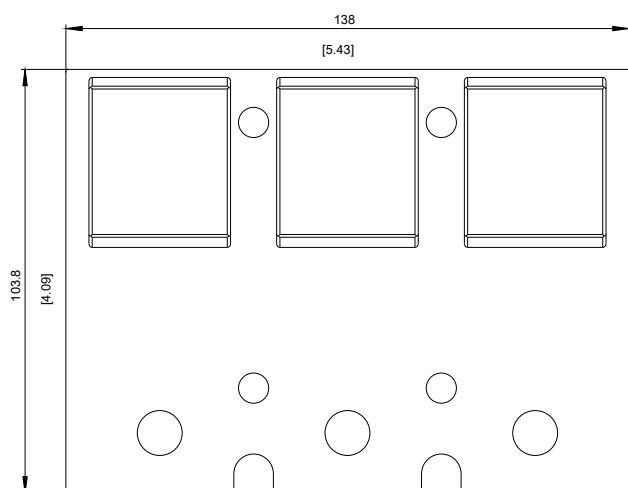

last modified:

03/30/2020