


CIRCUIT-BREAKER VL 160N STANDARD BREAKING CAPACITY
 ICU=55KA / 415 V AC 3 POLE, NON-AUTOMATIC OVERCURRENT
 RELEASE MAGNETIC IN=100A, RATED CURRENT II=2500A,
 SHORT CIRCUIT

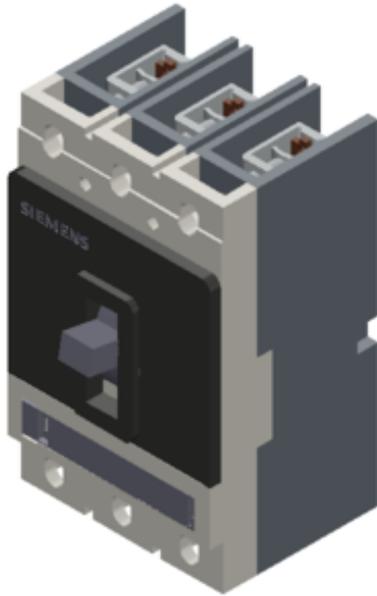

Model	
Type of the driving mechanism / motor drive	No
Design of the overcurrent release	M
General technical data	
Number of poles	3
Size of the circuit-breaker	3VL2
Electrical endurance (switching cycles) / typical	10 000
Usage category	A
Performance class for circuit breaker	N
Mechanical service life (switching cycles) / typical	20 000
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	Q
Operating frequency / maximum	120 1/s
Voltage	
Rated operational voltage U_e / max.	690 V
Insulation voltage	
• rated value	800 V
• at AC / rated value	800 V

Surge voltage resistance / rated value	8 kV
Protection class	
Protection class IP	IP20
Protective function of the overcurrent release	I
Electricity	
Continuous current / rated value	100 A
Derating temperature / for the rated value of the continuous current	50 °C
Adjustable pick-up value current	
<ul style="list-style-type: none"> • of instantaneous short-circuit trip unit / initial value 	2 500 A
<ul style="list-style-type: none"> • of instantaneous short-circuit trip unit / Full-scale value 	2 500 A
Main circuit	
Operating frequency	
<ul style="list-style-type: none"> • 1 / rated value 	50 Hz
<ul style="list-style-type: none"> • 2 / rated value 	60 Hz
Operating voltage	
<ul style="list-style-type: none"> • for main current circuit / at AC / at 50 Hz / maximum 	690 V
<ul style="list-style-type: none"> • for main current circuit / at AC / at 60 Hz / maximum 	690 V
<ul style="list-style-type: none"> • for main current circuit / at DC / maximum 	500 V
Operating current	
<ul style="list-style-type: none"> • at 40 °C / rated value 	100 A
<ul style="list-style-type: none"> • at 50 °C / rated value 	100 A
<ul style="list-style-type: none"> • at 55 °C / rated value 	93 A
<ul style="list-style-type: none"> • at 60 °C / rated value 	93 A
<ul style="list-style-type: none"> • at 65 °C / rated value 	86 A
<ul style="list-style-type: none"> • at 70 °C / rated value 	86 A
Suitability	
Suitability for use	non-automatic circuit-breakers
Product details	
Product component	
<ul style="list-style-type: none"> • Trip indicator 	No
<ul style="list-style-type: none"> • Auxiliary switch 	No
<ul style="list-style-type: none"> • Voltage trigger 	No
<ul style="list-style-type: none"> • undervoltage release 	No
<ul style="list-style-type: none"> • undervoltage release with leading contact 	No
Product extension / optional / motor drive	Yes

Product function	
Product function	
• of thermal overload trip unit	without
• Ground fault protection	No
• for neutral conductors / Short-circuit and overload proof	No
• Overload protection	No
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 500 V / rated value	20 kA
• at 690 V / rated value	6 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 440 V / rated value	25 kA
• at 480 V / acc. to NEMA / rated value	25 kA
• at 500 V / rated value	25 kA
• at 600 V / acc. to NEMA / rated value	12 kA
• at 690 V / rated value	12 kA
Connections	
Arrangement of electrical connectors / for main current circuit	front side
Type of electrical connection / for main current circuit	box terminals
Mechanical Design	
Height	174.5 mm
Width	104.5 mm
Depth	106.5 mm
Mounting type	fixed mounting
Environmental conditions	
Ambient temperature	
• during operation / minimum	0 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Certificates	
Certificate of suitability	IEC, standard switching capacity (N)
Equipment marking	

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------



[sonstig](#)

[TSE](#)

[KTL](#)



Test Certificates	Shipping Approval
--------------------------	--------------------------

[spezielle Prüfbescheinigungen](#)



Shipping Approval	other
--------------------------	--------------



[Umweltbestätigung](#)

[Bestätigungen](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL2710-1DE33-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL2710-1DE33-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL2710-1DE33-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>