

ACCESSORY FOR VL160X, VL160, VL250, STORED ENERGY
OPERATOR 24V DC

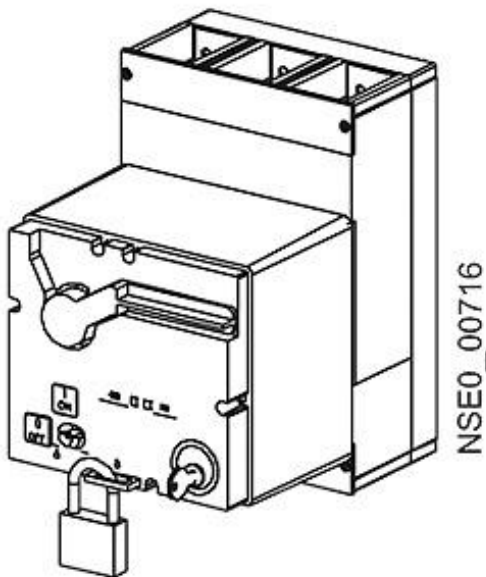


Figure similar

Model	
product brandname	SETRON
Type of the driving mechanism	Motorized operating mechanism with spring energy store
General technical data	
Break time / typical	5 s
Operating frequency / maximum	120 1/h
Voltage	
Fuse protection type / for external auxiliary power supply / required	NEOZED fuse (gL/gG): 6 A / miniature circuit breaker, C char.: 6 A
Operating range factor control supply voltage rated value	
• at AC / at 60 Hz / initial value	0.85
• at AC / at 60 Hz / Full-scale value	1.1
• at DC / initial value	0.85
• at DC / Full-scale value	1.1
Protection class	

Protection class IP	IP30
Electricity	
Make time / typical	0.1 s
Control current	
Operating apparent output	100 V·A
Control supply voltage	
• at DC / rated value / minimum	24 V
• at DC / rated value / maximum	24 V
Operating range factor control supply voltage rated value / at AC / at 50 Hz	
• initial value	0.85
• Full-scale value	1.1
Accessories	
accessories	Accessories for VL160X; VL160; VL250
Connections	
Connectable conductor cross-section / stranded	
• minimum	0.75 mm ²
• maximum	1.5 mm ²
Wire stripping length	10 mm
Connectable conductor cross-section	
• solid	
— minimum	0.75 mm ²
— maximum	1.5 mm ²
• finely stranded / with core end processing	
— minimum	0.75 mm ²
— maximum	1.5 mm ²
Tightening torque	
• minimum	1 N·m
• maximum	1.2 N·m
Mechanical Design	
Height	103 mm
Width	98 mm
Depth	166 mm
Net weight	2 755 g
Environmental conditions	
Ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C

Certificates

Equipment marking

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

M
M

General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	-----	---------------------------	-------------------	-------------------

[sonstig](#)



[spezielle
Prüfbescheinigungen](#)
[n](#)



Shipping Approval	other
-------------------	-------



[Bestätigungen](#)

[Umweltbestätigung](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL9300-3MJ00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL9300-3MJ00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL9300-3MJ00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

