## **SIEMENS**

## **Data sheet**

## 3WL1216-3EB35-4AS4-Z C22+K07

withdrawable circuit breaker without guide frame 3-pole, size II, IEC In=1600A to 690V, AC50/60Hz Icu=80kA at 500V rear connection horizontal Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.: Comm. /measuring func./ground fault/ ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release With 2nd auxiliary release "RC", F4 Undervoltage, Delay 0.2-3.2s 208-240 V AC, 220-250 V DC, 100% ED 4NO+4NC C22= Ready indicator K07= Tripped signaling contact, 1 CO not possible with option F02

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU45B
General technical data	
number of poles	3
size of the circuit-breaker	2
utilization category	В
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LSIN
Dissipation	
power loss [W]	
<ul> <li>for rated value of the current / at AC / in hot operating state / per pole</li> </ul>	58.7 W
maximum	175 W
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	4
number of NO contacts / for auxiliary contacts	4
Suitability	
suitability for use	Plant / motor protection
Adjustable parameters	
adjustable current response value current / of the L-trip / with I4t characteristic	
• initial value	640 A
• full-scale value	1 600 A
adjustable current response value current / of the current- dependent overload release / initial value	640 A
Product details	
product component	
• trip indicator	Yes

<ul> <li>voltage trigger</li> </ul>	No
undervoltage release	Yes
design of the auxiliary switch	4 NO + 4 NC
product extension / optional / motor drive	No
Product function	
product function	
<ul> <li>grounding protection</li> </ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
Display and operation	
display version	without display
Short circuit	
operating short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	80 kA
<ul><li>at 500 V / rated value</li></ul>	80 kA
at 690 V / rated value	75 kA
maximum short-circuit current breaking capacity (Icu)	
<ul><li>at 415 V / rated value</li></ul>	80 kA
<ul><li>at 500 V / rated value</li></ul>	80 kA
<ul><li>at 690 V / rated value</li></ul>	75 kA
Connections	
arrangement of electrical connectors / for main current circuit	without guide frame
type of electrical connection / for main current circuit	Blade contacts
Mechanical Design	
height	411.5 mm
width	451 mm
depth	337 mm
fastening method	drawer unit
Environmental conditions	
ambient temperature / during operation	
• minimum	-20 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
maximum	70 °C
Further information	

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1216-3EB35-4AS4-Z C22+K07

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3WL1216-3EB35


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3WL1216-3EB35-4AS4-Z C22+K07">http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3WL1216-3EB35-4AS4-Z C22+K07</a>


**CAx-Online-Generator** 


http://www.siemens.com/cax


**Tender specifications** 









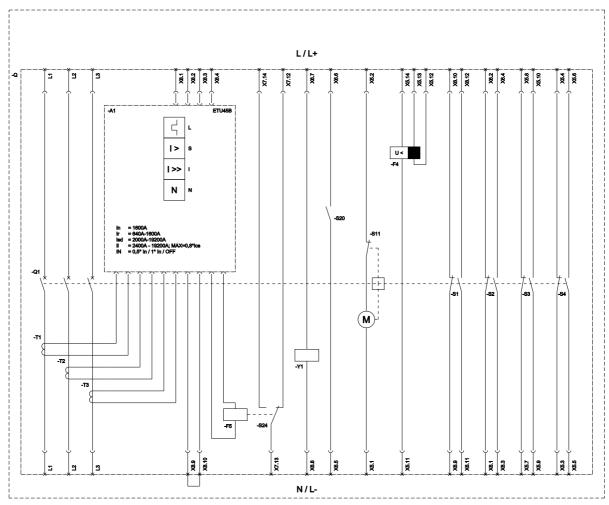

L (Long Time Duley ('Declarationis), S (Short Time Duley ('Excardamentes, termelrengen); ((Instantaneous /Karacabanentes, uneverlagen); (Notemal Protection /Notemal Invoiction /Notemal I

last modified: 5/31/2025 🖸

