

SSS RELAIS 24V/24V 0,1ADC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



Similar to illustration

Individual relays for TERMSERIES

- Solid-state relays
- Different output versions

General ordering data

Version	TERMSERIES, solid-state relays, 1 NO contact (Bipolar transistor), Rated control voltage: 18 V DC...24 V DC...30 V DC, Rated switching voltage: 0...48 V DC, Continuous current: 100 mA, Plug-in connection
Order No.	4061180000
Type	SSS RELAIS 24V/24V 0,1ADC
GTIN (EAN)	4032248415076
Qty.	20 pc(s).

Creation date March 29, 2021 8:30:04 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SSS RELAIS 24V/24V 0,1ADC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	15 mm	Depth (inches)	0.591 inch
Height	28 mm	Height (inches)	1.102 inch
Net weight	3.53 g	Width	5 mm
Width (inches)	0.197 inch		

Temperatures

Storage temperature	-40 °C...70 °C	Operating temperature	-20 °C...60 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Probability of failure

MTTF	4,298 Years
------	-------------

Control side

Nominal control current	7 mA DC ($\pm 10\%$)	Power rating	170 mW
Rated control voltage	24 V DC $\pm 25\%$	Status indicator	No

Load side

Continuous current	0.1 A	Leakage current	< 10 μ A
Min. switching current	500 μ A	Protective circuit, load side	Free-wheeling diode
Rated switching voltage	48 V DC	Short-circuit-proof	No
Voltage drop at max. load	≤ 1 V		

Contact data

Contact type	1 NO contact (Bipolar transistor)
--------------	-----------------------------------

General data

Colour	black
--------	-------

Insulation coordination

Clearance and creepage distances for control side - load side	≥ 5.5 mm	Dielectric strength for control side - load side	2.5 kV _{eff}
---	---------------	--	-----------------------

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

Classifications

ETIM 6.0	EC001504	ETIM 7.0	EC001504
ECLASS 9.0	27-37-16-04	ECLASS 9.1	27-37-16-04
ECLASS 10.0	27-37-16-04	ECLASS 11.0	27-37-16-04

SSS RELAIS 24V/24V 0,1ADC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS

Conform

Downloads

Engineering Data

[STEP](#)

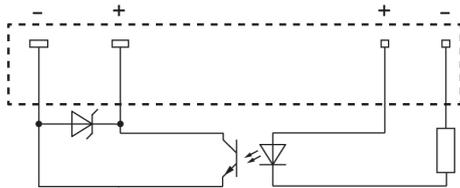
Engineering Data

[WSCAD](#)

SSS RELAIS 24V/24V 0,1ADC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings**Wiring diagram**

View of pins from below

Dimensional drawing