


Air solenoid valve VZWM-L-M22C-G2-F5-R1

Part number: 546169

FESTO

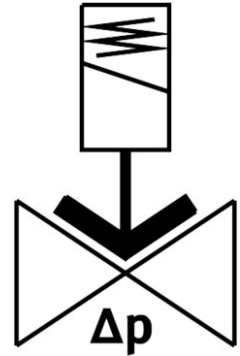

 General operating condition

Data sheet

Feature	Value
Structural design	servo-controlled
Actuation type	Electrical
Sealing principle	Soft
Mounting position	Preferably upright
Type of mounting	Line installation
Fitting connection	G2
Electrical connection	Solenoid coil type MH-..., coil can be ordered as an accessory
Nominal width	50 mm
Valve function	2/2, closed, monostable
Flow direction	Non-reversible
Medium	Compressed air as per ISO 8573-1:2010 [7:4:4] Inert gas Water Neutral liquids
Medium pressure of liquid media	0.07 MPa ... 0.6 MPa
Medium pressure of liquid media	0.7 bar ... 6 bar
Medium pressure of liquid media	10.15 psi ... 87 psi
Medium pressure of gaseous media	0.07 MPa ... 1 MPa
Medium pressure of gaseous media	0.7 bar ... 10 bar
Medium pressure of gaseous media	10.15 psi ... 145 psi
Burst pressure	4 MPa
Burst pressure	40 bar
Burst pressure	580 psi
Overload pressure	2.5 MPa
Overload pressure	25 bar
Overload pressure	362.5 psi
Pressure difference	0.07 MPa
Differential pressure	0.7 bar
Pressure difference	10.15 psi
Type of control	Pilot-controlled

Feature	Value
Symbol	00995681
Max. viscosity	22 mm ² /s
Temperature of medium	-10 °C ... 60 °C
Temperature of liquid media	5 °C ... 50 °C
Ambient temperature	-10 °C ... 60 °C
Flow rate Kv	39 m ³ /h
Standard nominal flow rate	31000 l/min
On switching time	62 ms
Response time "on" for liquid media	2100 ms
Switching time off	21 ms
Response time "off" for liquid media	2800 ms
b-value	0.68
C value	110 l/sbar
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III
Housing material	Cast stainless steel
Material number of housing	1.4581
Seals material	NBR
Armature tube material	High-alloy steel
Product weight	3660 g
CE marking (see declaration of conformity)	as per EU pressure equipment directive
UKCA marking (see declaration of conformity)	according to UK regulations for pressure equipment
Corrosion resistance class (CRC)	3 - High corrosion stress
Max. torque for cover screw	30 Nm
Max. tightening torque for connecting thread	620 Nm
Max. tightening torque for coil fastening	2 Nm