



SITOP BUFFER MODULE FOR 6EP1X3X-3BAX0
BUFFERING TIME 100 MS TILL 10 S DEPENDENT UPON
LOAD

Technical specifications

Input

Supply voltage / for DC / rated value	24 V
---------------------------------------	------

Mains buffering

Output

Output current / nominal value	40 A
--------------------------------	------

Efficiency

Protection and monitoring

Signaling

Interface

Product component / PC interface	No
----------------------------------	----

Design of the interface	without
-------------------------	---------

Safety

Galvanic isolation / between entrance and outlet	Yes
--	-----

Verification of suitability / UL-registration	Yes
---	-----

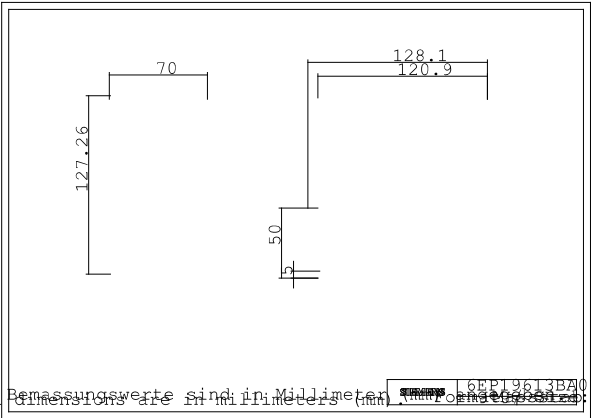
Verification of suitability / CE mark	Yes
---------------------------------------	-----

Protection class IP	IP20
---------------------	------

EMC

Operating data

Ambient temperature / in operation	0 ... 60 °C
------------------------------------	-------------

Ambient temperature / on transport	-40 ... +85 °C
Ambient temperature / in storage	-40 ... +85 °C
Mechanics	
Design of the electrical connection	screw-type terminals
Width / of the housing	70 mm
Height / of the housing	125 mm
Depth / of the housing	125 mm
Installation width	70 mm
Required spacing / top	50 mm
Required spacing / bottom	50 mm
Required spacing / left	0 mm
Required spacing / right	0 mm
Net weight	1.2 kg
Product feature / of the housing / housing for side-by-side mounting	Yes
	

letzte Änderung:

Jul 17, 2012