


TWO-TIER DIODE TERMINAL PASSAGE FROM TOP TO B. LE.,
 FROM BOTTOM RI. TO BOTTOM LEFT WITH SPRING CONNECTION,
 SECTION: 0.08 - 2.5 MM², WIDTH: 5.2 MM,
 COLOR: GRAY

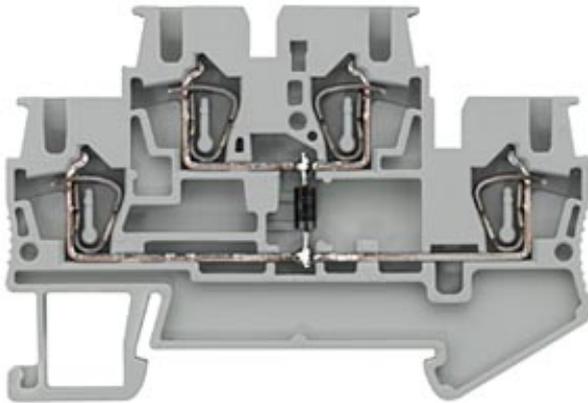

Similar to image

Technical data:

Design tested acc. to type of protection / EEx e		No
Component type		diode
Length	mm	67.5
Height / with lowest-profile installation	mm	47.5
Mounting type		DIN rail 35 mm
Number of terminal levels		2
Number of terminal points / per terminal level		2
Design of terminal / terminal levels linked internally		No
Operating voltage / rated value	V	500
Operating current / rated value	A	26
Combustibility class acc. to UL 94		V0
Color		grey
Insulation material		others
Terminal contact spacing	mm	5.2
Position / of terminal		top
Product component / required / connection plate		No
Design of the electrical connection		
<ul style="list-style-type: none"> • 1 		spring-loaded terminal

• 2

spring-loaded terminal

Conductor cross-section that can be connected

- solid
- multibrin
- finely stranded
 - with wire end processing
 - without wire end processing

mm ²	4 ... 4
mm ²	4 ... 4
mm ²	2.5 ... 2.5
mm ²	2.5 ... 2.5

Certificates/approvals:

General Product Approval

Declaration of Conformity



GOST



UL



EG-Konf.

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH2020-5KF00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH2020-5KF00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2020-5KF00

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 17, 2014