




Fibre optic diffuse reflection sensor

FT-18-P-A-M6

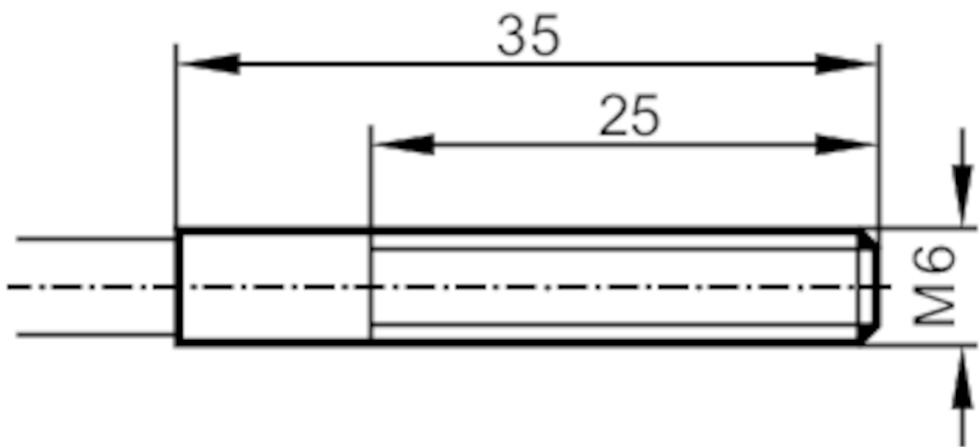

Application		
Function principle	Diffuse reflection sensor	
Detection zone		
Range with fibre optic amplifier type	OGF	
OGF		
Range fibre optics	[mm]	15
Operating conditions		
Ambient temperature	[°C]	-20...80

E20383



Fibre optic diffuse reflection sensor

FT-18-P-A-M6

Mechanical data		
Weight	[g]	50.2
Version of sensing head		straight
Sensing head thread		M6
Sensing head length	[mm]	35
Total length	[mm]	600
Min. bending radius	[mm]	20
Fibre arrangement		ⓘ
Materials		Adapter: PPE
Fibre material		glass
Fibre head material		aluminium
Fibre sheath material		PVC
Accessories		
Accessories (supplied)		hexagon nuts: 4 x M6, stainless steel
		tooth lock washers: 2
Remarks		
Notes		discontinued article
Pack quantity		1 pcs.